WAAS	APP CRS	Rwy Ldg	6304
CH 69311	313°	TDZE	1114
W31A		Apt Elev	1119

RNAV (GPS) RWY 31

THIEF RIVER FALLS RGNL (TVF)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using CKN altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use CKN altimeter setting: increase LPV DA to 1447 feet; increase LNAV/VNAV DA to 1569 feet and all visibilities ¼ SM; increase all MDAs 100 feet and visibility Cats C and D ¼ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to 1 SM and LNAV Cats C/D visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 2700 direct WIMUS and hold.

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
119.025	132.15 269.6	122.8 (CTAF) L

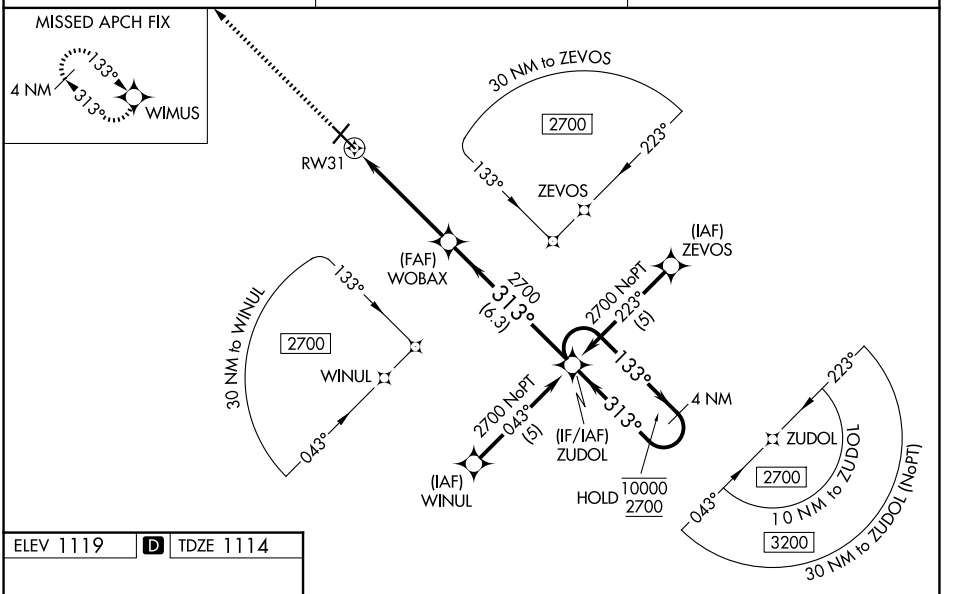

ELEV 1119 D TDZE 1114



HIRL Rwy 13-31 L
MIRL Rwy 4-22 L
REIL Rwys 4, 13 and 22 L

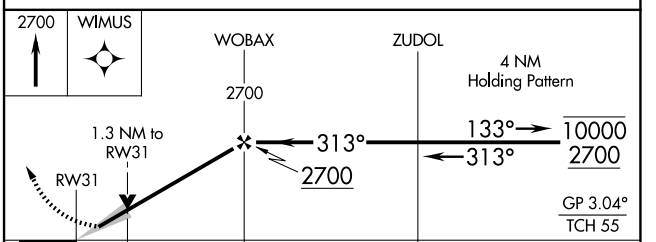

CATEGORY	A	B	C	D
LPV DA	1364-½ 250 (300-½)			
LNAV/VNAV DA	1486-⅝ 372 (400-⅝)			
LNAV MDA	1580-½ 466 (500-½)		1580-1 466 (500-1)	
CIRCLING	1580-1 461 (500-1)		1820-2 701 (800-2)	1980-2¾ 861 (900-2¾)

NC-1, 16 APR 2026 to 14 MAY 2026
NC-1, 16 APR 2026 to 14 MAY 2026