| WAAS CH 70526 W05A | APP CRS 054° | Rwy Ldg 5502 / TDZE 455 / Apt Elev 459 |
|---|---|---|

# RNAV (GPS) RWY 5
MOORE COUNTY (SOP)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSR, increase LNAV/VNAV all Cats visibility to ⅞ mile, LNAV Cats A/B visibility to 1 mile and LNAV Cats C/D visibility to 1⅛ mile. When local altimeter setting not received, use Sanford altimeter setting and increase all DA 88 feet and all MDA 100 feet, increase LNAV/VNAV all Cats visibility ⅛ mile, LNAV Cats C/D visibility ¼ mile, and Circling Cat C ½ mile. When using Sanford altimeter setting, for inop MALSR increase LNAV/VNAV all Cats visibility to 1⅛ mile, LNAV Cats A/B visibility to 1 mile, and LNAV Cat C/D visibility to 1⅜ mile. Baro-VNAV and VDP NA when using Sanford altimeter setting.

MALSR

MISSED APPROACH: Climb to 2500 direct OWWEN and hold.

| AWOS-3PT | FAYETTEVILLE APP CON | UNICOM |
|---|---|---|
| 127.575 | 127.8 343.725 | 123.05 (CTAF) L |

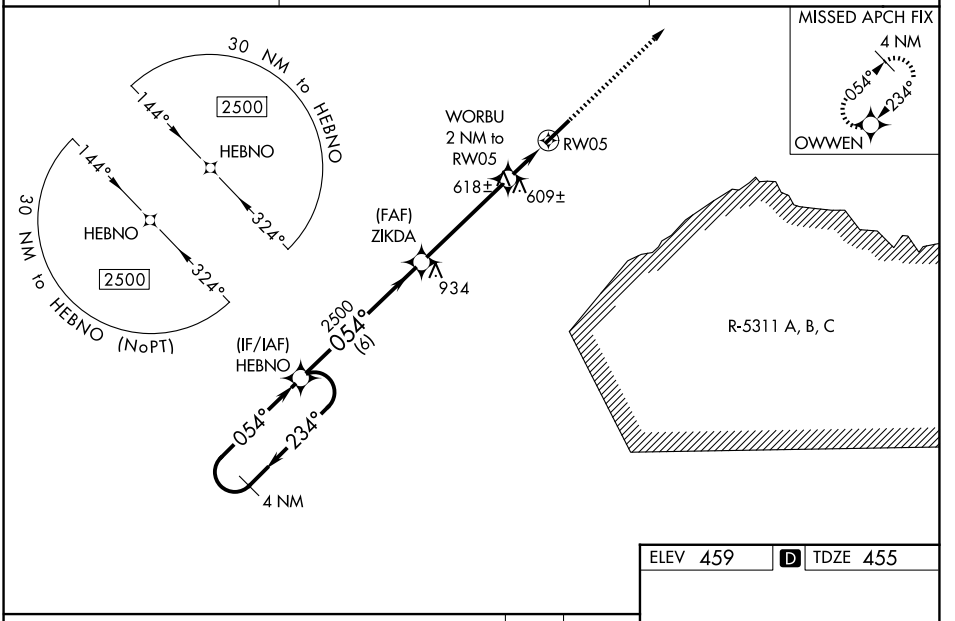


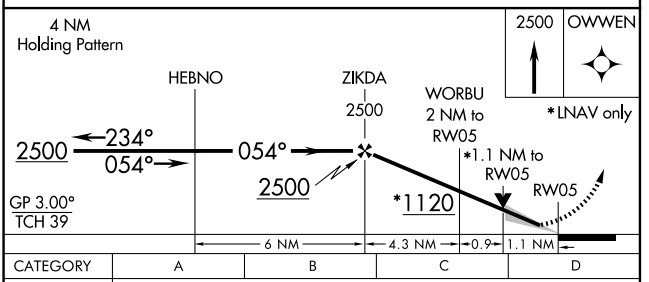


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 655-½ 200 (200-½) | | | |
| LNAV/VNAV DA | 750-½ 295 (300-½) | | | |
| LNAV MDA | 860-½ 405 (500-½) | | 860-¾ 405 (500-¾) | |
| CIRCLING | 880-1 421 (500-1) | 920-1 461 (500-1) | 1100-1¾ 641 (700-1¾) | 1360-3 901 (1000-3) |

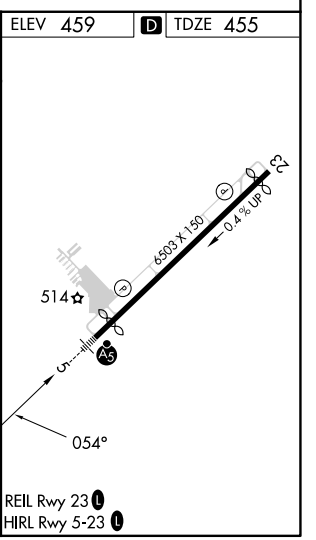





SE-2, 16 APR 2026 to 14 MAY 2026