| APP CRS | Rwy Ldg | 10000 |
|---|---|---|
| 087° | TDZE | 91 |
| | Apt Elev | 96 |

# RNAV (RNP) Y RWY 9

## GEORGE BUSH INTCNTL/HOUSTON (IAH)

For uncompensated Baro-VNAV systems, procedure NA below -3°C (27°F) or above 54°C (130°F). GPS required. For inop MALSR, increase all Cats visibility to 1⅜ mile. Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 580 then climbing right turn to 3000 direct JEBOX and hold.

| D-ATIS | HOUSTON APP CON | HOUSTON TOWER | GND CON |
|---|---|---|---|
| 124.05 | 120.05 379.1 E<br>124.35 316.15 W | 135.15 290.2 | 118.575 |

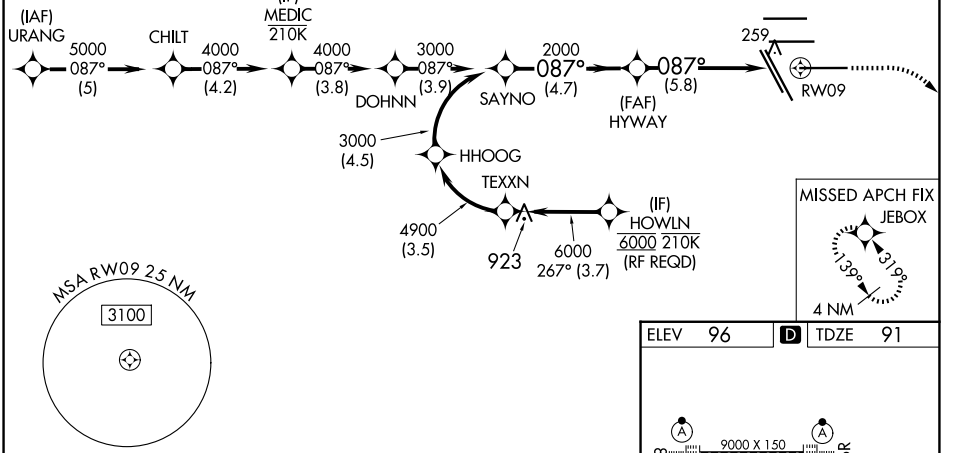





ELEV 96 D TDZE 91




VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

580 3000 JEBOX

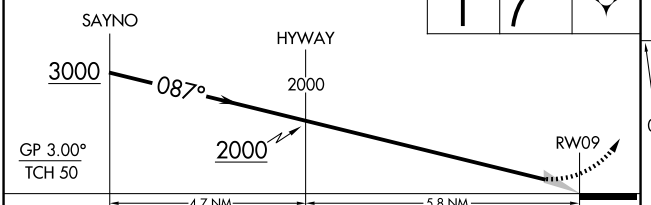


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| RNP 0.30 DA | 516/49 | 425 (500-1) | | |

## AUTHORIZATION REQUIRED

TDZ/CL Rwys 8R, 8L, 15R, 26R, 26L, 27 and 33L
HIRL all Rwys




SC-5, 16 APR 2026 to 14 MAY 2026