

WAAS CH 56504 W 36A	APP CRS 356°	Rwy Idg TDZE Apt Elev	4403 918 918
---	------------------------	-----------------------------	---


RNAV (GPS) RWY 36

FORT SCOTT MUNI (F'SK)

NA When local altimeter setting not received, use Chanute altimeter setting and increase all DAs 93 feet and all MDAs 100 feet; increase Circling Cat C/D visibility ½ SM. Baro-VNAV NA when using Chanute altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.


MISSED APPROACH: Climb to 3000 direct ECARO and hold.

AWOS-3P 124.425	KANSAS CITY CENTER 125.55 327.0	UNICOM 122.8 (CTAF)
---------------------------	---	-------------------------------

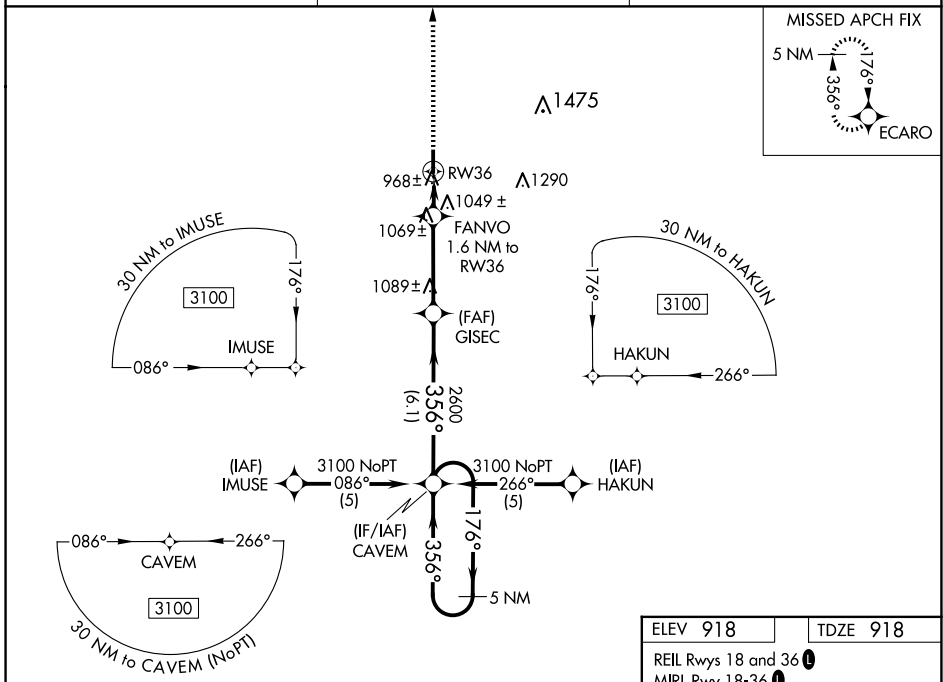


NC-2, 16 APR 2026 to 14 MAY 2026

NC-2, 16 APR 2026 to 14 MAY 2026

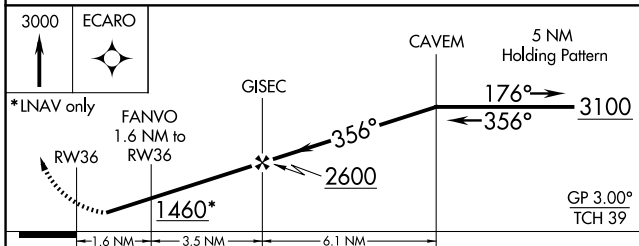

ELEV 918	TDZE 918
REIL Rwy 18 and 36	MIRL Rwy 18-36

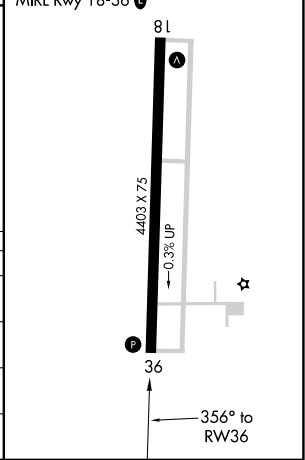

CATEGORY	A	B	C	D
LPV DA		1189-1	271 (300-1)	
LNAV/VNAV DA		1240-1¼	322 (400-1¼)	
LNAV MDA	1320-1	402 (500-1)	1320-1¼	402 (500-1¼)
CIRCLING	1320-1 402 (500-1)	1380-1 462 (500-1)	1640-2 722 (800-2)	1640-2¼ 722 (800-2¼)