

WAAS CH <b>48923</b> W <b>14A</b>	APP CRS <b>143°</b>	Rwy Ldg <b>5001</b> TDZE <b>22</b> Apt Elev <b>22</b>
---	------------------------	---


# RNAV (GPS) RWY 14

DESTIN EXEC (DTS)



**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F).  
**⚠** Baro-VNAV and VDP NA when using Crestview altimeter setting. Rwy 14 helicopter visibility reduction below 3/4 SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Crestview altimeter setting and increase all DA/MDA 80 feet; increase LPV all Cats visibility 1/2 SM, LNAV/VNAV all Cats visibility 3/4 SM, increase LNAV Cats C and D 1/2 SM, and Circling Cats C and D 1/4 SM.

**MISSED APPROACH:**  
 Climb to 2000 direct  
 AJLUP and hold.

ATIS <b>133.925</b>	EGLIN APP CON <b>132.1 360.6</b>	DESTIN TOWER ★ <b>118.45 (CTAF) 0</b>	GND CON <b>121.6</b>
------------------------	-------------------------------------	--	-------------------------

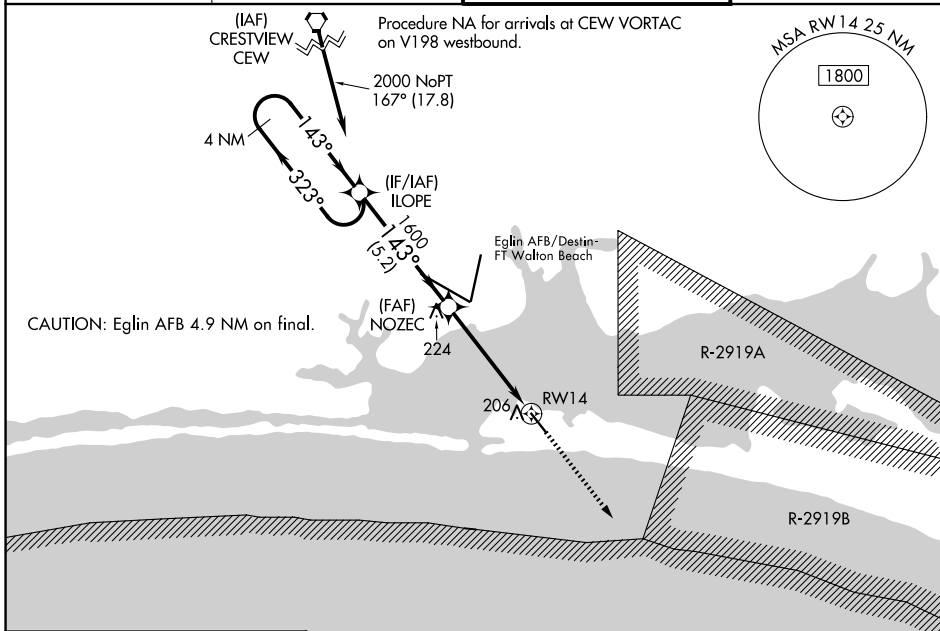

ELEV <b>22</b>	TDZE <b>22</b>
----------------	----------------

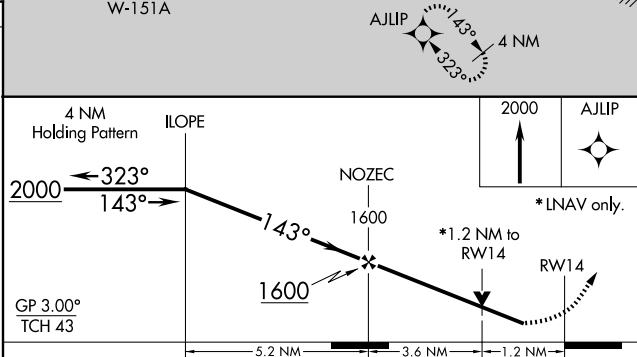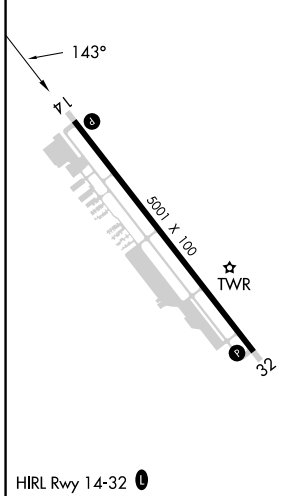

CATEGORY	A	B	C	D
LPV DA	272-1 250 (300-1)			
LNAV/VNAV DA	367-1 3/4 345 (400-1 1/2)			
LNAV MDA	460-1	438 (500-1)	460-1 1/4	438 (500-1 1/4)
CIRCLING	580-1	558 (600-1)	680-1 3/4	680-2
			658 (700-1 3/4)	658 (700-2)

SE-3, 16 APR 2026 to 14 MAY 2026

SE-3, 16 APR 2026 to 14 MAY 2026