

LOC/DME I-SVH 111.75 Chan 54 (Y)	APP CRS 285°	Rwy Ldg 6453 TDZE 967 Apt Elev 968
--	------------------------	---

ILS Z or LOC Z RWY 28

STATESVILLE RGNL (SVH)


DME required.

When local altimeter setting not received, use Lincolnnton altimeter setting and increase ILS DA to 1219 and all MDA 60 feet; increase S-LOC 28 Cats C/D visibility 3/8 mile and Circling Cat C visibility 1/4 mile. VDP NA when using Lincolnnton altimeter setting. For inop MALSRS when using Lincolnnton altimeter setting, increase S-ILS 28 all Cats visibility to 3/8 mile and S-LOC 28 Cats C/D visibility to 1 mile.

MALSRS


MISSED APPROACH: Climb to 1700 then climbing left turn to 3400 on heading 105° and CLT VOR/DME R-025 to PEGTE INT/I-SVH 13.2 DME and hold.

AWOS-3 119.225	ATLANTA CENTER 125.15 263.0	UNICOM 123.075 (CTAF) 0
--------------------------	---------------------------------------	-----------------------------------

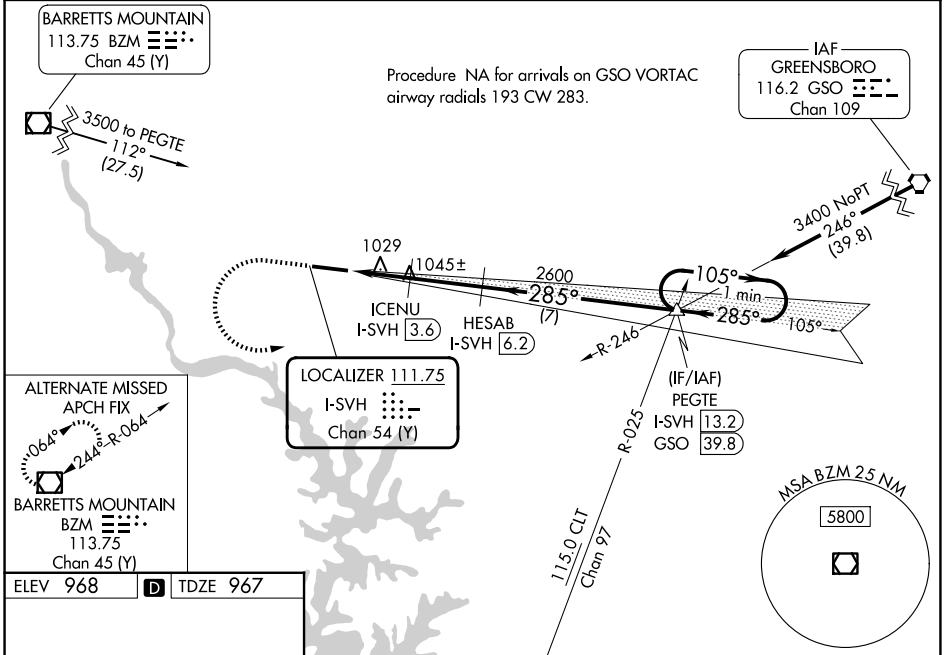

ELEV 968 **D** TDZE 967

REIL Rwy 10 **0**
HIRL Rwy 10-28 **0**

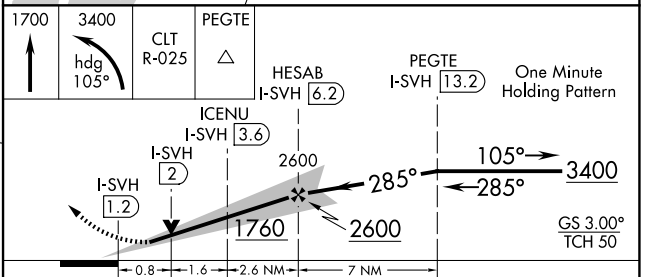

CATEGORY	A	B	C	D
S-ILS 28	1167-1/2		200 (200-1/2)	
S-LOC 28	1280-1/2		313 (400-1/2)	
CIRCLING	1420-1	1540-1	1540-1/2	1560-2
	452 (500-1)	572 (600-1)	572 (600-1/2)	592 (600-2)