

WAAS CH 69203 W24A	APP CRS 238°	Rwy Ldg 6500 TDZE 66 Apt Elev 67
--	------------------------	---

RNAV (GPS) Z RWY 24

DEADHORSE (SCC) (PASC)


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.
For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cnts visibility to RVR 5000, and LNAV Cat E visibility to RVR 6000.
#RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR



MISSED APPROACH: Climb to 500 then climbing left turn to 1700 direct MAJEF and hold.

AFIS 118.4	ANCHORAGE CENTER 134.4 370.9	DEADHORSE RADIO 123.6 (CTAF) 0
----------------------	--	--

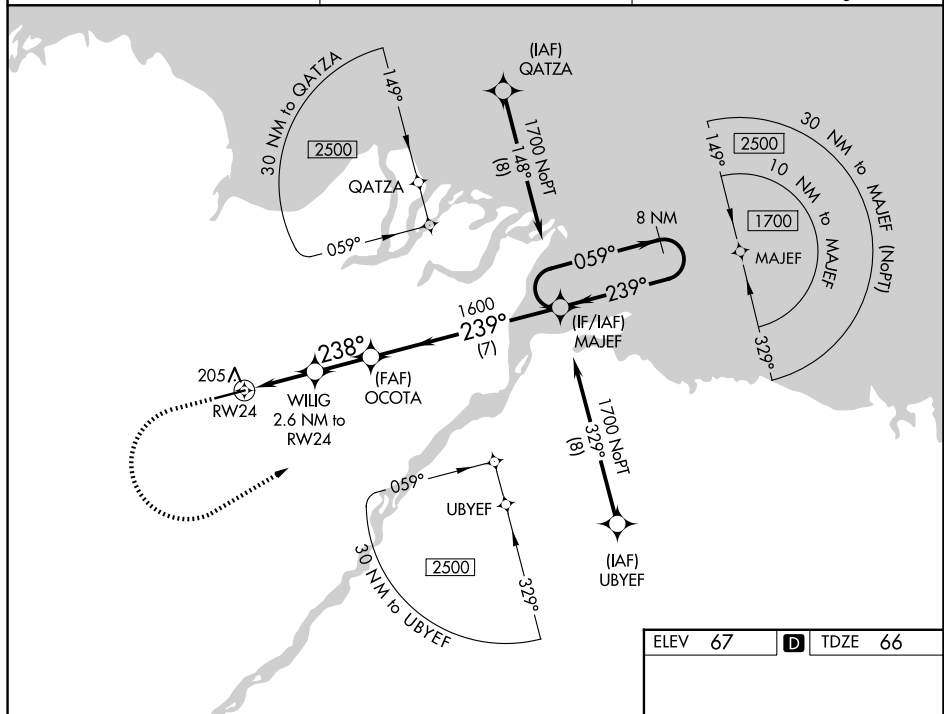

ELEV 67	D	TDZE 66
---------	----------	---------

