


| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 49132 W22A | APP CRS 224° | Rwy Ldg TDZE Apt Elev | 4001 823 823 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 22


CLINTON RGNL (GLY)

| | |
|--|---|
| RNP APCH. | <p>MISSED APPROACH: Climb to 3000 direct SOGOY and hold.</p> |
| <p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Whiteman AFB altimeter setting and increase all DA 61 feet and all MDA 80 feet. Increase LNAV/VNAV all Cats and LNAV Cat C visibility ¼ mile. Circling Rwy 4 NA at night. Rwy 22 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA when using Whiteman altimeter setting.</p> | |

| | | |
|----------------------------|-------------------------------------|---------------------------------|
| AWOS-3PT 120.475 | WHITEMAN APP CON ★ 127.45 | UNICOM 122.8 (CTAF) 0 |
|----------------------------|-------------------------------------|---------------------------------|

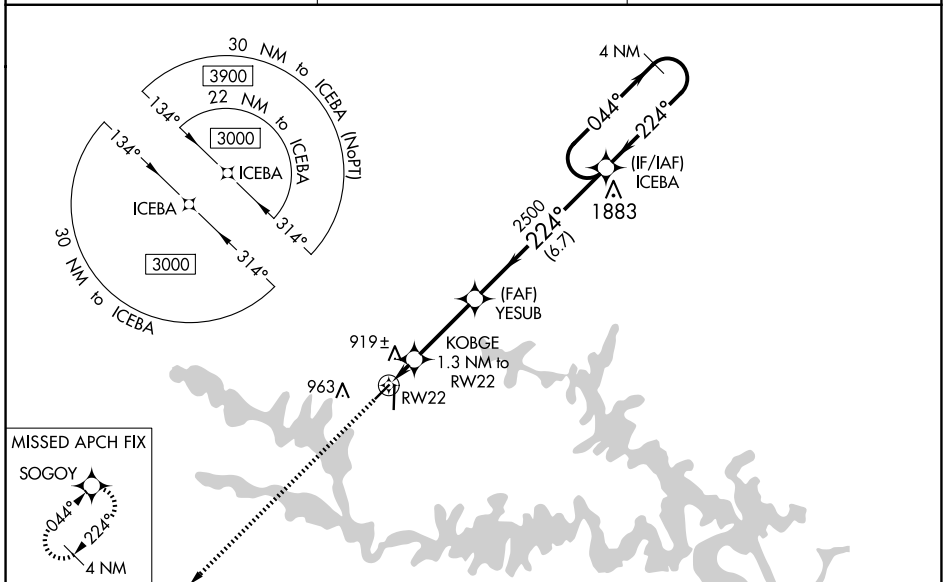

| | |
|----------|----------|
| ELEV 823 | TDZE 823 |
|----------|----------|

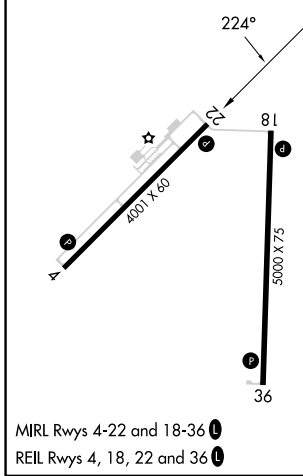

| CATEGORY | A | B | C | D |
|-------------------|-----------------------|-----------------------|-------------------------|----|
| LPV DA | 1115-1 | 292 (300-1) | | NA |
| LNAV/VNAV DA | 1216-1½ | 393 (400-1½) | | NA |
| LNAV MDA | 1180-1 | 357 (400-1) | | NA |
| C CIRCLING | 1280-1 457 (500-1) | 1300-1 477 (500-1) | 1340-1½ 517 (600-1½) | NA |

NC-3, 16 APR 2026 to 14 MAY 2026

NC-3, 16 APR 2026 to 14 MAY 2026