WAAS	APP CRS	Rwy Idg	5002
Ch 42817	228°	TDZE	1013
W23A		Apt Elev	1013

RNAV (GPS) RWY 23

PICKENS COUNTY (LQK)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Clemson altimeter setting and increase LPV DA to 1356 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1594 feet; increase all MDAs 60 feet and LNAV Cat C and Circling Cat D visibility ¼ SM, increase LNAV Cat D visibility ⅛ SM. Baro-VNAV NA when using Clemson altimeter setting. VDP NA with Clemson altimeter setting.

NA

MISSED APPROACH: Climb to 3000 direct ZAKOB and hold.

AWOS-3	GREER APP CON ★	UNICOM
120.0	118.8 270.275	122.8 (CTAF) L

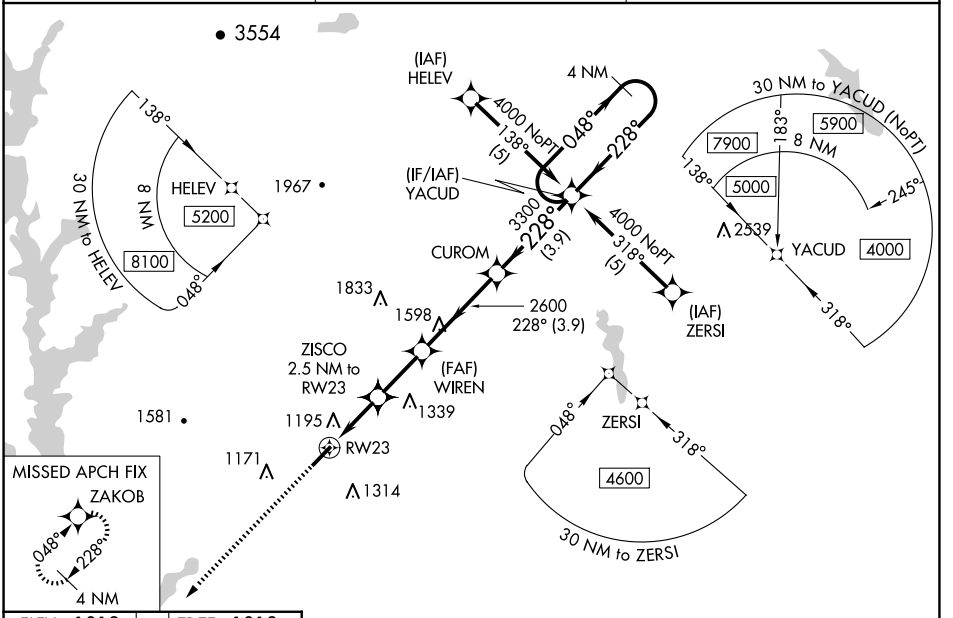

ELEV 1013	TDZE 1013



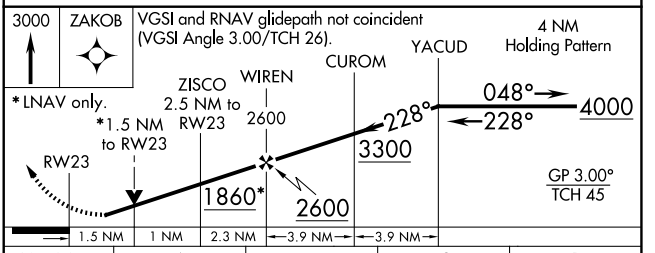

CATEGORY	A	B	C	D
LPV DA	1310-1 297 (300-1)			
LNAV/ VNAV DA	1548-2 535 (600-2)			
LNAV MDA	1500-1 487 (500-1)		1500-1⅜ 487 (500-1⅜)	1500-1½ 487 (500-1½)
CIRCLING	1560-1 547 (600-1)	1620-1 607 (700-1)	1620-1¾ 607 (700-1¾)	1780-2½ 767 (800-2½)

MIRL Rwy 5-23 L

SE-2, 16 APR 2026 to 14 MAY 2026
SE-2, 16 APR 2026 to 14 MAY 2026