


LOC I-MQJ 108.7	APP CRS 252°	Rwy Ldg TDZE Apt Elev	6005 860 862
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 25


INDIANAPOLIS RGNL (MQJ)

NA When local altimeter setting not received, use Indianapolis Intl altimeter setting and increase all DA 55 feet and all MDA 60 feet, increase S-LOC 25 Cats C/D visibility 1/2 mile and Circling Cat D visibility 1/4 mile.

MALSRL 

MISSED APPROACH: Climb to 1400 then climbing left turn to 2400 on SHB VOR/DME R-334 to SHB VOR/DME and hold.

AWOS-3PT 124.175	INDIANAPOLIS APP CON 127.15 317.8	UNICOM 122.975 (CTAF) 0
----------------------------	---	-----------------------------------

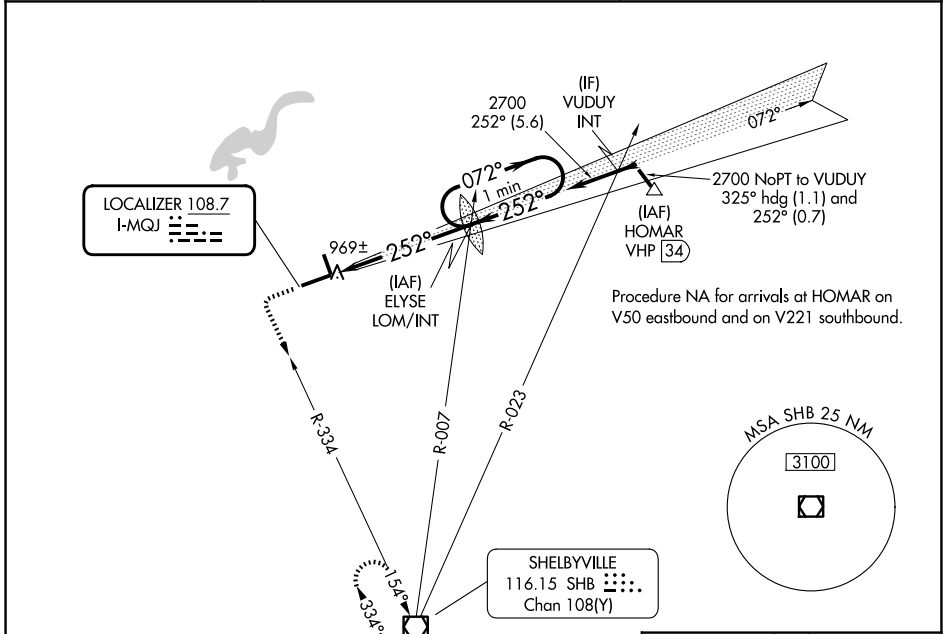





EC-2, 16 APR 2026 to 14 MAY 2026

EC-2, 16 APR 2026 to 14 MAY 2026



ELEV 862	TDZE 860
----------	----------



1400	2400	SHB	ELYSE LOM/INT	One Minute Holding Pattern
			2660	
			2700	
			2700	GS 3.00° TCH 53
			5.4 NM	

REIL Rwy 7 and 34	
HIRL Rwy 7-25 0	
MIRL Rwy 16-34	
FAF to MAP 5.4 NM	
Knots	60 90 120 150 180
Min:Sec	5:24 3:36 2:42 2:10 1:48

CATEGORY	A	B	C	D
S-ILS 25	1060-1/2 200 (200-1/2)			
S-LOC 25	1220-1/2	360 (400-1/2)	1220-5/8	360 (400-5/8)
CIRCLING	1340-1	478 (500-1)	1360-1/2	1660-2/2
			498 (500-1/2)	798 (800-2/2)