

WAAS CH <b>93838</b> <b>W27A</b>	APP CRS <b>270°</b>	Rwy Ldg 4043
		TDZE 1240
		Apt Elev 1243

# RNAV (GPS) RWY 27


CUMBERLAND MUNI (UBE)

RNP APCH - GPS.



▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using Rice Lake altimeter setting. Rwy 27 helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Rice Lake altimeter setting; increase LPV DA to 1533 feet and LNAV/VNAV DA to 1549 feet and all MDA 60 feet; increase LPV all Cats visibility and LNAV Cat C/D visibility 1/8 mile; increase Circling Cat D visibility 1/4 mile. Circling Rwy 18, 36 NA at night.

MISSED APPROACH: Climb to 3400 direct DESTE and hold.

AWOS-3PT <b>119.175</b>	MINNEAPOLIS CENTER <b>125.3 335.6</b>	GCO <b>121.725</b>	UNICOM <b>122.8 (CTAF) 0</b>
----------------------------	--	-----------------------	---------------------------------

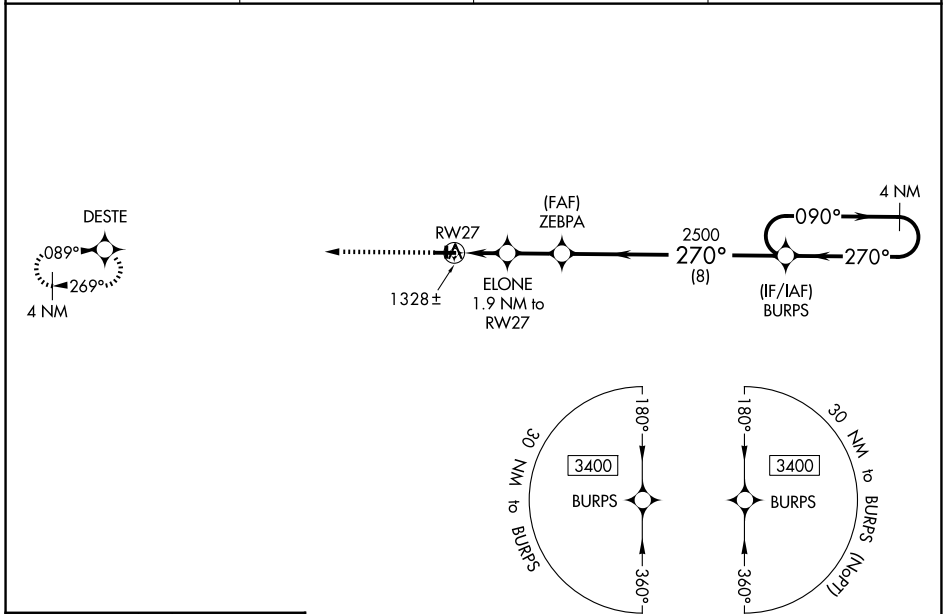

ELEV 1243	TDZE 1240
-----------	-----------

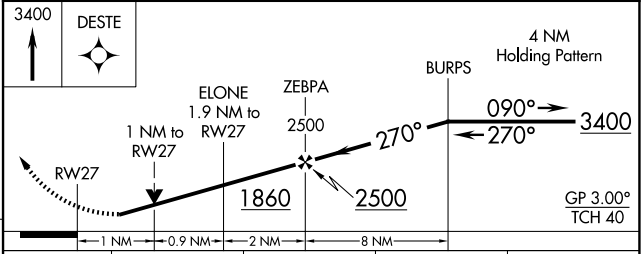

	A	B	C	D
LPV DA		1490-1	250 (300-1)	
LNAV/VNAV DA		1506-1	266 (300-1)	
LNAV MDA		1580-1	340 (400-1)	
CIRCLING	1640-1 397 (400-1)	1940-1 697 (700-1)	1940-2 697 (700-2)	1980-2 1/4 737 (800-2 1/4)

REIL Rwy 9 and 27 0  
MIRL Rwy 9-27 0

EC-3, 16 APR 2026 to 14 MAY 2026

EC-3, 16 APR 2026 to 14 MAY 2026