

APP CRS	Rwy Ldg	<b>3500</b>
<b>024°</b>	TDZE	<b>1008</b>
	Apt Elev	<b>1008</b>

# RNAV (GPS) RWY 2

POSSUM KINGDOM (F35)

RNP APCH-GPS.

Procedure NA at night. Rwy 2 helicopter visibility reduction below 1 SM NA. Use MWL altimeter setting; when not received, use LUD altimeter setting and increase all MDAs 80 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ½ SM.

MISSED APPROACH: Climbing right turn to 3500 direct ZOOOO and hold.



MWL ASOS  
**135.075**

FORT WORTH CENTER  
**127.0 360.6**


CTAF  
**122.9 0**

△ CIYAL

3500  
145.0  
(14.6)

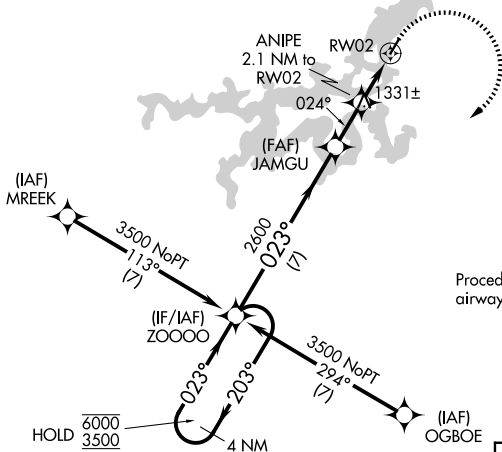

Procedure NA for arrival on MQP VORTAC airway radials 253 CW 330.



HOLD 6000 / 3500

4 NM

ELEV 1008


TDZE 1008

4 NM Holding Pattern


VGSI and descent angles not coincident (VGSI Angle 3.50/TCH 33).

3500

ZOOOO

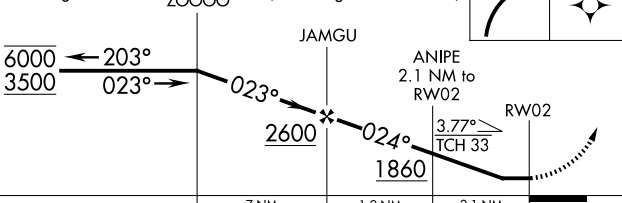

CATEGORY	A	B	C	D
LNAV MDA	1640-1	632 (700-1)	1640-1¼ 632 (700-1¼)	NA
CIRCLING	1700-1 692 (700-1)	1860-1¼ 852 (900-1¼)	1880-2½ 872 (900-2½)	NA

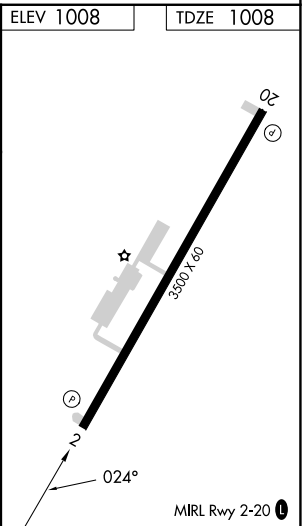

SC-2, 16 APR 2026 to 14 MAY 2026

SC-2, 16 APR 2026 to 14 MAY 2026