

| | | |
|--|------------------------|---|
| WAAS CH 63214 W18A | APP CRS 175° | Rwy Ldg 5200 TDZE 718 Apt Elev 733 |
|--|------------------------|---|

RNAV (GPS) RWY 18



CLAREMORE RGNL (GCM)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV Cats A/B visibility to 1% SM.


ODALS

MISSED APPROACH: Climb to 2400 direct DAVLE and hold.

| | | |
|----------------------------|---------------------------------------|---------------------------------|
| AWOS-3PT 119,925 | TULSA APP CON 119.1 360,825 | UNICOM 122.7 (CTAF) 0 |
|----------------------------|---------------------------------------|---------------------------------|

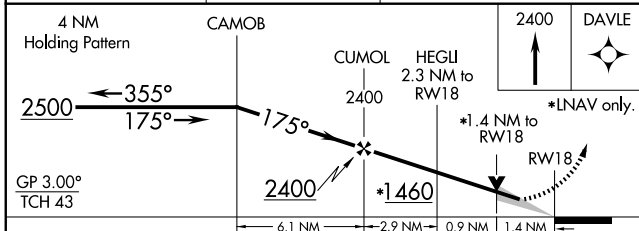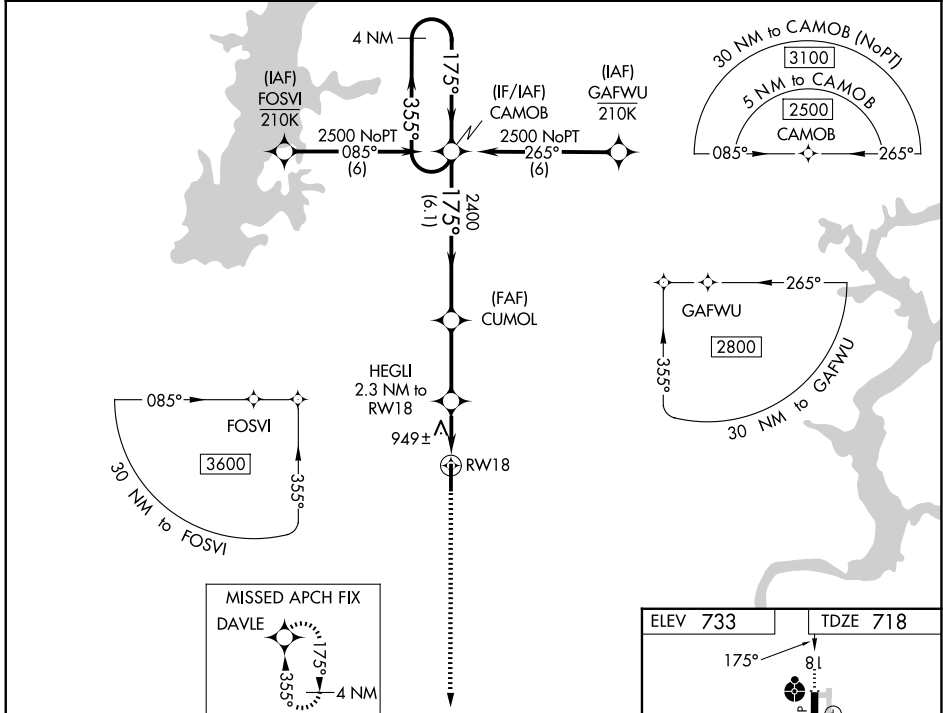

| CATEGORY | A | B | C | D |
|--------------|------------|-----------------|-------------------------------|----|
| LPV DA | 968-3/4 | 250 (300-3/4) | | NA |
| LNAV/VNAV DA | 1281-1 1/2 | 563 (600-1 1/2) | | NA |
| LNAV MDA | 1200-3/4 | 482 (500-3/4) | 1200-1 1/4 482 (500-1 1/4) | NA |
| CIRCLING | 1260-1 | 527 (600-1) | 1380-1 3/4 647 (700-1 3/4) | NA |

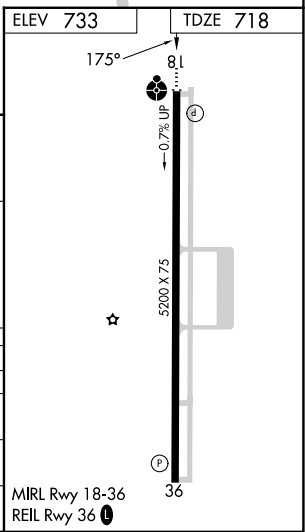

SC-1, 16 APR 2026 to 14 MAY 2026

SC-1, 16 APR 2026 to 14 MAY 2026