

WAAS CH 42741 W11A	APP CRS 111°	Rwy Idg 4982 TDZE 128 Apt Elev 128
--	------------------------	---

RNAV (GPS) RWY 11


ST GEORGE (PBV) (PAPB)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 47°C (117°F). DME/DME RNP-0.3 NA. Circling NA north of Rwy 11-29. Inop table does not apply to LPV all Cats and LNAV Cat A. For inop ALS, increase LNAV/VNAV all Cats visibility to 2½ SM. For inop ALS, increase LNAV Cat C visibility to 2½ SM.

MALSF

MISSED APPROACH: Climb to 600 then climbing right turn to 3000 direct OSUCA and hold.

ASOS 135.45	ANCHORAGE CENTER 119.1 339.8	CTAF 122.8
-----------------------	--	----------------------

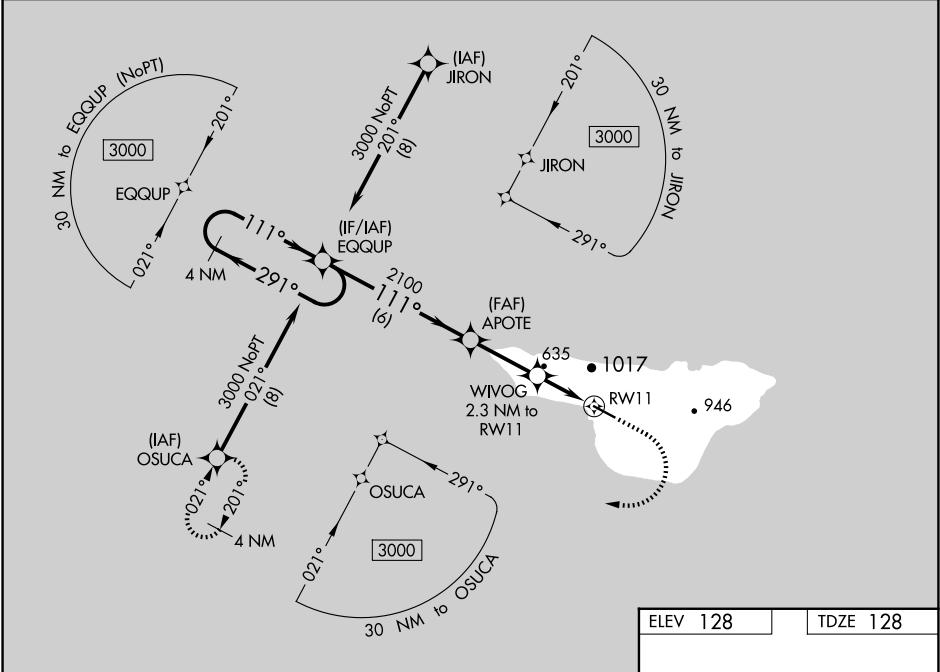

4 NM Holding Pattern 3000 GP 3.60° TCH 56		EQQUP 2100 6 NM	APOTE 2100 2.7 NM	WVVOG 2.3 NM to RW11 *1060 2.3 NM	RW11	600 3000 OSUCA * LNAV only.
CATEGORY	A	B	C	D		
LPV DA	428-1 300 (300-1)				NA	
LNAV/ VNAV DA	957-2 829 (900-2)				NA	
LNAV MDA	900-1 772 (800-1)		900-2 772 (800-2)		NA	
 CIRCLING	900-1 772 (800-1)	980-1¼ 852 (900-1¼)	980-2½ 852 (900-2½)		NA	

