




WAAS CH 87033 W17A	APP CRS 173°	Rwy Ldg 3200 TDZE 20 Apt Elev 20
--	------------------------	---

RNAV (GPS) RWY 17
KIPNUK (IIK) (PAKI)

⚠ Baro-VNAV NA when using Toksook Bay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Procedure NA at night. VDP NA when using Toksook Bay altimeter setting. When local altimeter setting not received use Toksook Bay altimeter setting: increase LPV DA to 389 feet and visibility all Cats ¼ SM. Increase LNAV/VNAV DA to 553 feet and visibility all Cats ½ SM. Increase all MDA 120 feet. Increase LNAV Cat C and D visibility to 1 ½ SM. Circling Cat C to 2 SM, Cat D to 2 ½ SM.

MISSED APPROACH:
Climb to 500 then
climbing left turn to
2400 direct JOSQO
and hold.

AWOS-3P 118.325	ANCHORAGE CENTER 125.2 372.0	CTAF 122.7 0
---------------------------	--	------------------------

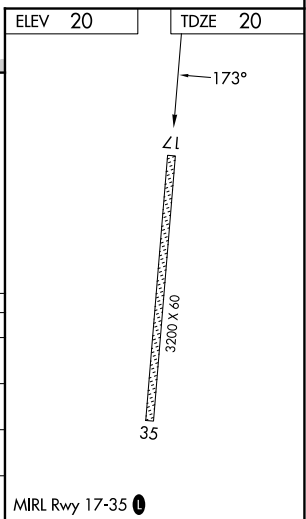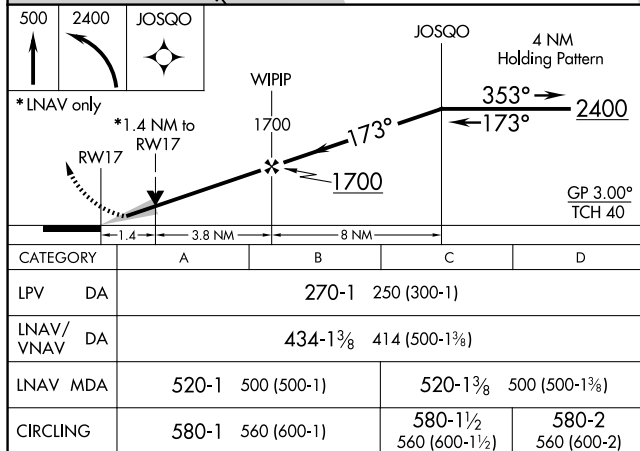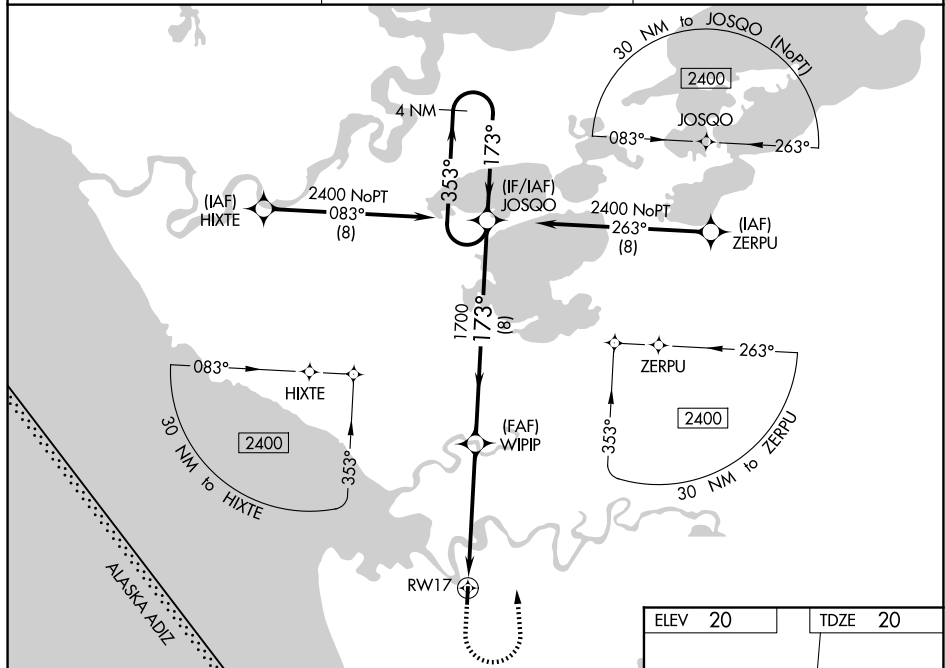

RNAV (GPS) RWY 17