


RNAV (GPS) RWY 20
CHEVAK (VAK)(PAVA)

V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Baro-VNAV and VDP NA when using HPB/PAHP altimeter setting. When local altimeter setting not received, use HPB/PAHP altimeter setting and increase LNAV/VNAV DA to 352 feet; increase all MDAs 60 feet and LNAV visibility Cat C/D ½ SM and Circling visibility Cat D ¼ SM.

MISSED APPROACH: Climb to 500, then climbing left turn to 3000 direct PEYKI and hold.

CTAF
123.0

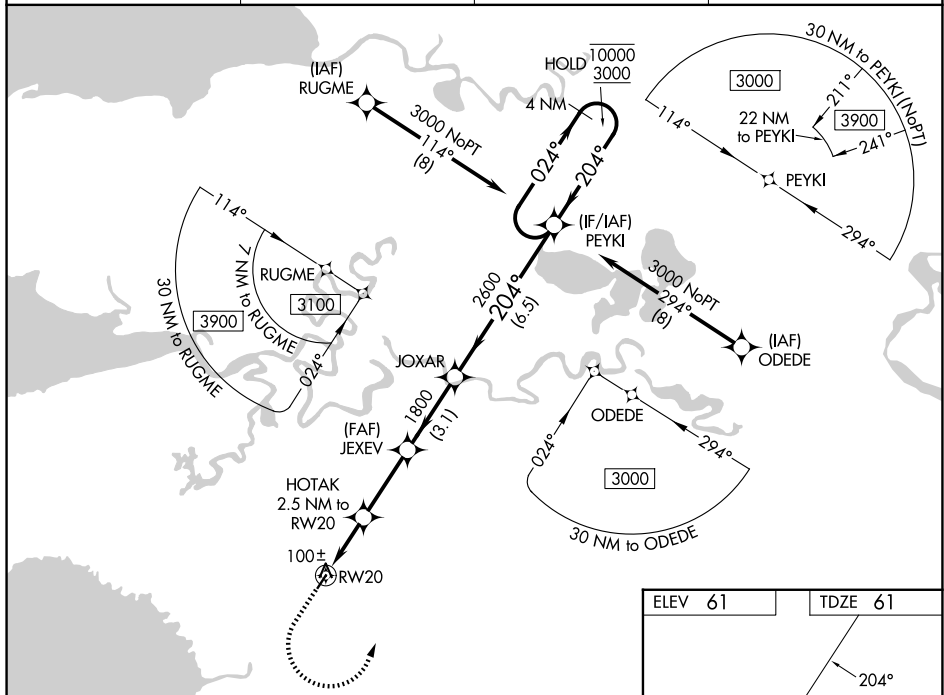

500 3000 PEYKI

VGS and RNAV glidepath not coincident
(VGS Angle 3.00/TCH 25).

HOTAK
2.5 NM to RW20

JEXEV
1800

JOXAR

PEYKI

4 NM Holding Pattern

024° → 10000
← 204° 3000

GP 3.00°
TCH 40

2600

1800

204°

204°

1.1 NM to RW20

1.1 NM

1.4 NM


2.9 NM

3.1 NM

6.5 NM

RW20

CATEGORY	A	B	C	D
LNAV/DA	311-1 250 (300-1)			
LNAV/MDA	420-1 359 (400-1)			
CIRCLING	520-1 459 (500-1)	520-1½ 459 (500-1½)		700-2 639 (700-2)

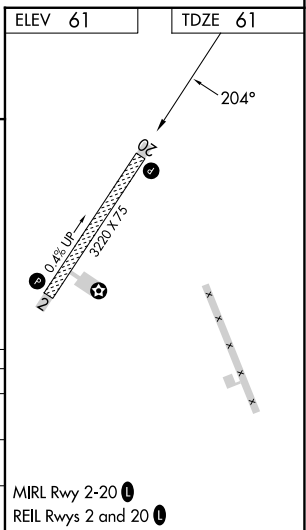

AK, 19 MAR 2026 to 14 MAY 2026

AK. 19 MAR 2026 to 14 MAY 2026