




APP CRS	Rwy Ldg	9001
334°	TDZE	45
	Apt Elev	46

RNAV (RNP) Z RWY 33

CHARLESTON AFB/INTL (CHS)

RNP AR APCH. RF required.	MALSR	MISSED APPROACH: Climb to 3000 direct MAMAE and hold, continue to climb-in-hold to 3000.
▼ For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C. For inop ALS, increase RNP 0.23 all Cats visibility to RVR 5500.		

D-ATIS 124.75	CHARLESTON APP CON 120.7 306.925	CHARLESTON TOWER 126.0 239.0	GND CON 121.9 348.6
-------------------------	--	--	-------------------------------

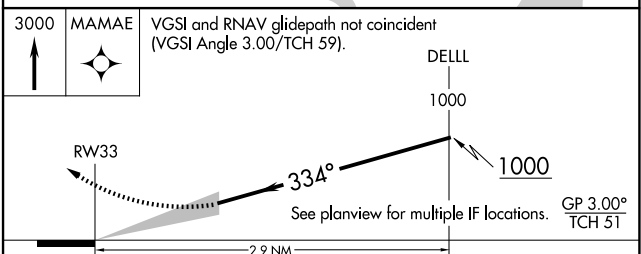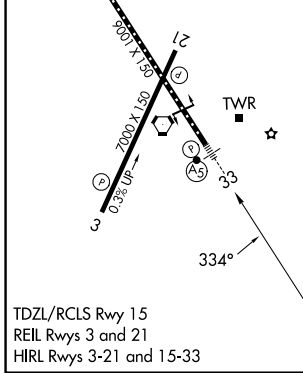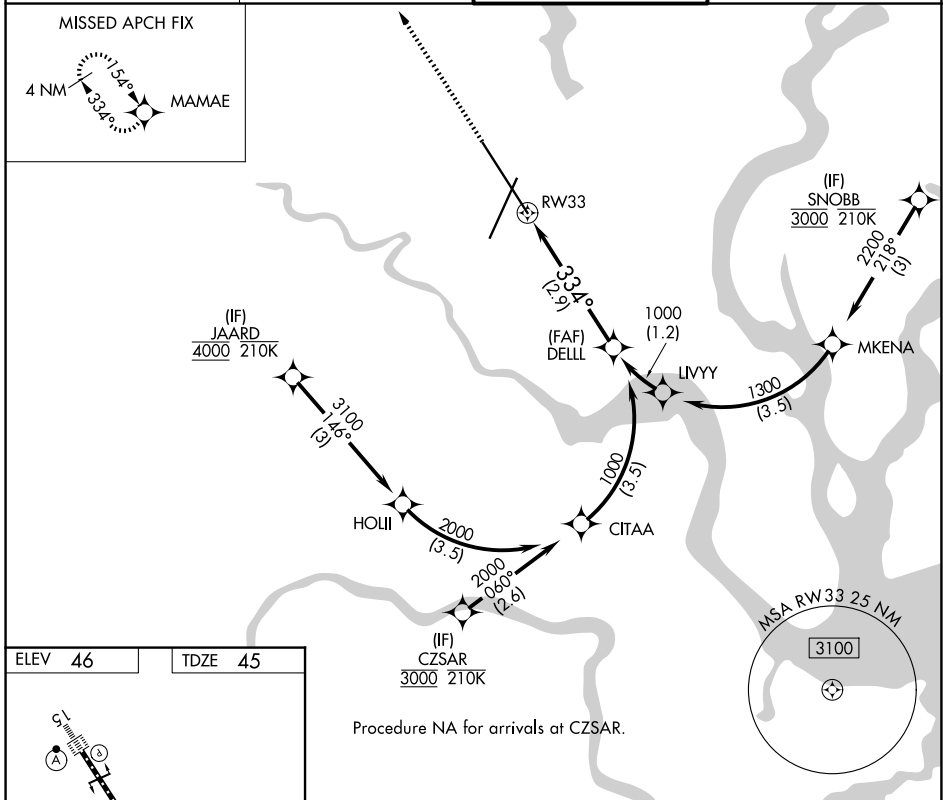

CATEGORY	A	B	C	D
RNP 0.23 DA		419/35	374 (400-3/4)	
RNP 0.30 DA		477/40	432 (500-3/4)	

AUTHORIZATION REQUIRED

SE-2, 14 MAY 2026 to 11 JUN 2026

SE-2, 14 MAY 2026 to 11 JUN 2026