

| | | |
|------------------------|-----------------------------|--|
| APP CRS 352° | Rwy Ldg TDZE Apt Elev | 11022 6075 6187 |
|------------------------|-----------------------------|--|


RNAV (RNP) Z RWY 35L

CITY OF COLORADO SPRINGS MUNI (COS)



▼ For uncompensated Baro-VNAV systems, procedure NA below -21°C (-5°F) or above 45°C (113°F). GPS required. For inop MALSRS increase RNP 0.15 visibility all Cats to RVR 5000. RADAR monitoring required when R-2601 in use.

MALSRS MISSED APPROACH: Climb to 9000 on track 352° to ZAMLO and on track 037° to JEPMA and on track 118° to ADANE and hold.

| | | | | |
|----------------------------|---|-------------------------------------|-------------------------------|-----------------------------------|
| ATIS 125.0 254.3 | SPRINGS APP CON 124.0 257.875 | SPRINGS TOWER 119.9 360.6 | GND CON 121.7 348.6 | CLNC DEL 134.45 363.125 |
|----------------------------|---|-------------------------------------|-------------------------------|-----------------------------------|

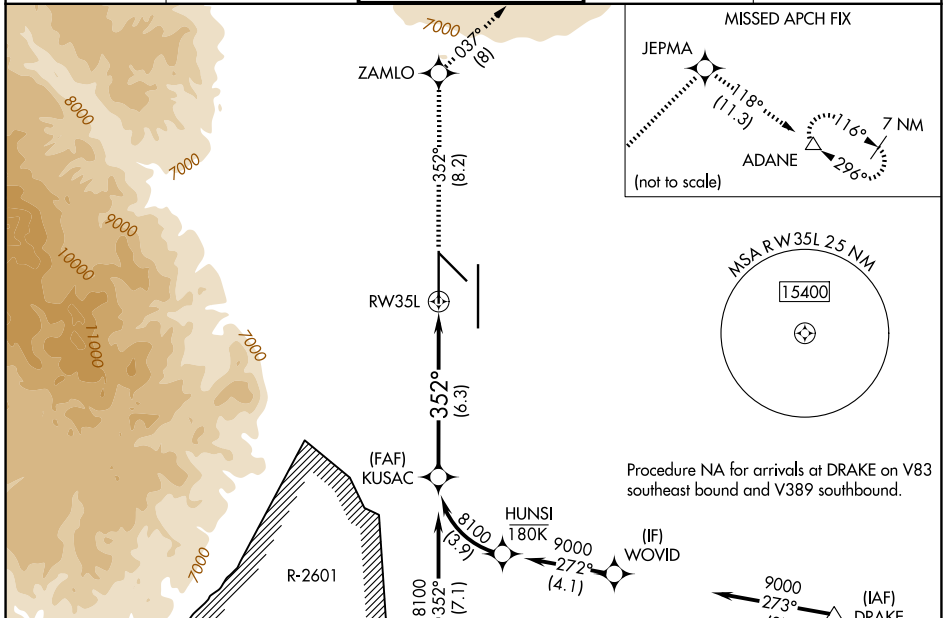

| | | |
|--------------------------------|----------|-----------|
| ELEV 6187 | D | TDZE 6075 |
| MIRL Rwy 13-31 | | |
| HIRL Rwys 17R-35L and 17L-35R | | |
| REIL Rwys 13, 17R, 31, and 35R | | |
| TDZ/CL Rwys 17L and 35R | | |

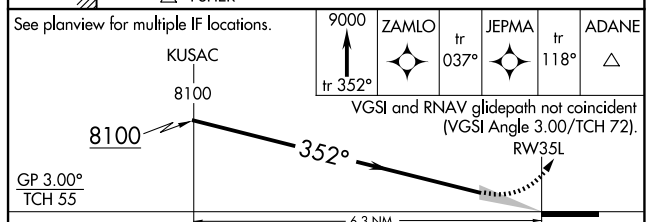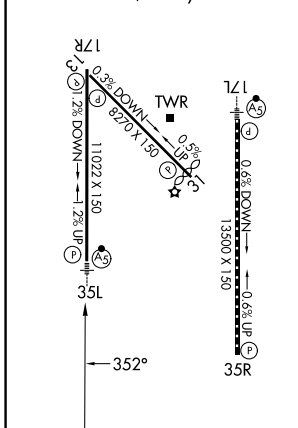

| CATEGORY | A | B | C | D |
|-------------|---|---------|---------------|---|
| RNP 0.15 DA | | 6372/30 | 297 (200-5/8) | |
| RNP 0.30 DA | | 6427/40 | 352 (300-3/4) | |

AUTHORIZATION REQUIRED

SW-1, 14 MAY 2026 to 11 JUN 2026

SW-1, 14 MAY 2026 to 11 JUN 2026