
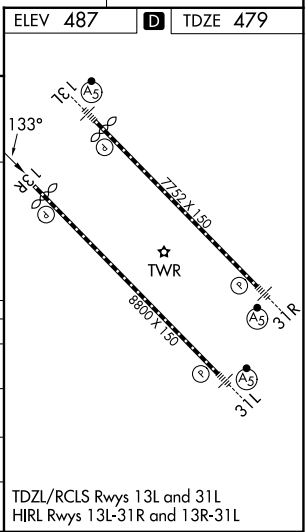
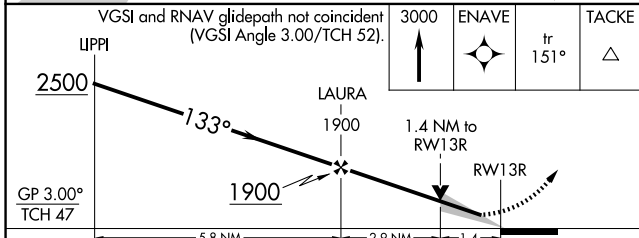


WAAS CH 82436 W13A	APP CRS 133°	Rwy Ldg 8310 TDZE 479 Apt Elev 487
--	------------------------	---

RNAV (GPS) Z RWY 13R

DALLAS LOVE FLD (DAL)

RNP APCH - GPS.		MISSED APPROACH: Climb to 3000 direct ENAVE and on track 151° to TACKE and hold.	
▼ LNAV procedure NA during simultaneous operations. Simultaneous approach authorized. ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Use of FD or AP required during simultaneous operations.	D-ATIS 120.15	LONE STAR APP CON 124.3 282.275 (N) 125.2 343.65 (S)	LOVE TOWER 123.7 239.3
			GND CON 121.75 348.6

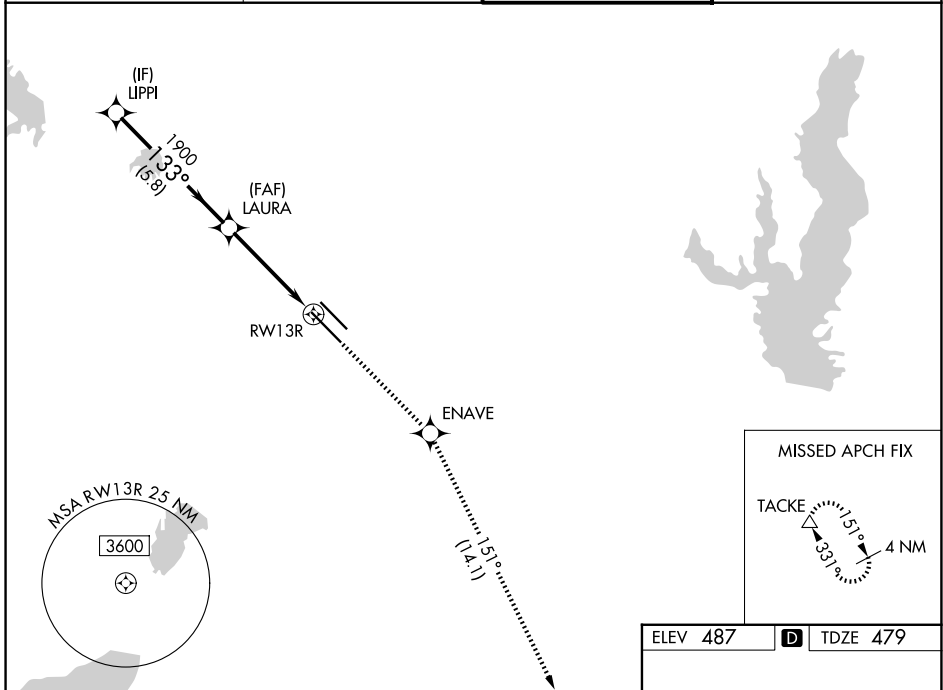

CATEGORY	A	B	C	D
LPV DA		679/40	200 (200-¾)	
LNAV/VNAV DA		834/55	355 (400-1)	
LNAV MDA	980/55	501 (500-1)	980-1⅜	501 (500-1⅝)
CIRCLING	1080-1 593 (600-1)	1140-1 653 (700-1)	1280-2¼ 793 (800-2¼)	1520-3 1033 (1100-3)

TDZL/RCLS Rwy 13L and 31L
HIRL Rwy 13L-31R and 13R-31L