


VORTAC ELP <b>115.2</b> Chan <b>99</b>	APP CRS <b>245°</b>	Rwy Ldg TDZE Apt Elev <b>9025</b> <b>3962</b> <b>3962</b>
--	------------------------	--

# VOR RWY 26L


EL PASO INTL (ELP)

Inop table does not apply to S-26L and CINAG fix minimums S-26L. Circling NA for Cat D northwest of Rwy 4-22. ASR	MALS R AS	MISSED APPROACH: Climb to 4500 then climbing left turn to 7100 on heading 050° and on ELP VORTAC R-081 to FEMOL INT/9 DME and hold.	
		D-ATIS <b>120.0 254.3</b>	EL PASO APP CON <b>124.25 298.85</b>

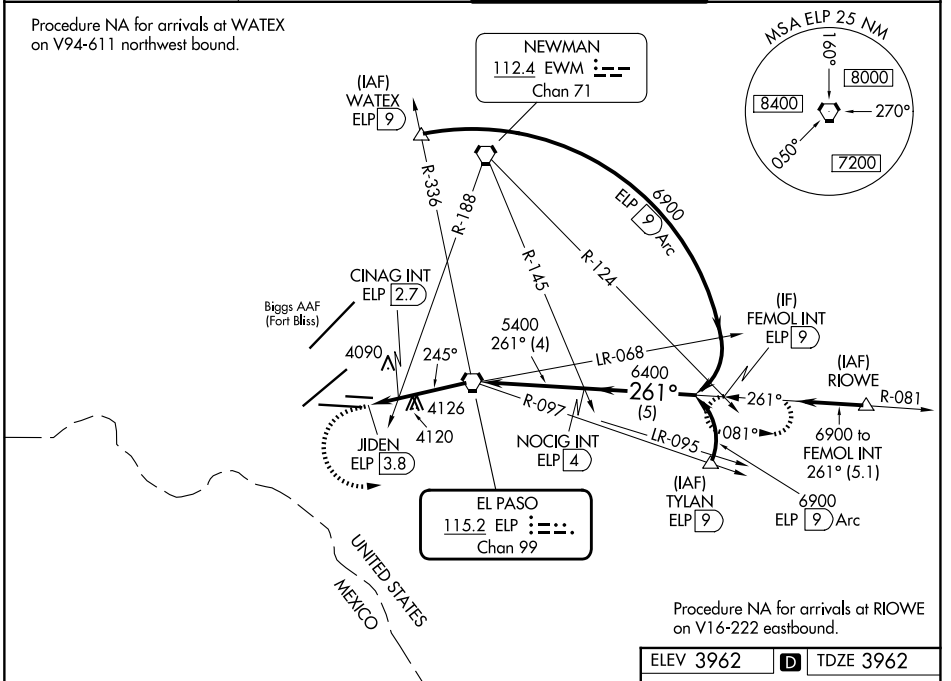

SC-3, 14 MAY 2026 to 11 JUN 2026

SC-3, 14 MAY 2026 to 11 JUN 2026

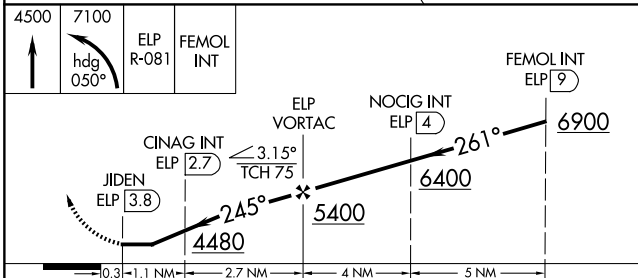

ELEV 3962		TDZE 3962
-----------	--	-----------

CATEGORY	A	B	C	D	E
S-26L	4480-1	518 (600-1)	4480-1 $\frac{3}{8}$	518 (600-1 $\frac{3}{8}$ )	NA
CIRCLING	4480-1	518 (600-1)	4480-1 $\frac{1}{2}$	4680-2 518 (600-1 $\frac{1}{2}$ ) 718 (800-2)	NA
CINAG FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)					
S-26L	4380-1	418 (500-1)	4380-1 $\frac{1}{8}$	418 (500-1 $\frac{1}{8}$ )	NA
CIRCLING	4420-1 458 (500-1)	4440-1 478 (500-1)	4480-1 $\frac{1}{2}$	4680-2 $\frac{1}{4}$ 718 (800-2 $\frac{1}{4}$ )	NA

MRL Rwy 8L-26R REIL Rwy 4 and 8R HIRL Rwy 4-22 and 8R-26L					
FAF to MAP 3.8 NM					
Knots	60	90	120	150	180
Min:Sec	3:48	2:32	1:54	1:31	1:16