LOC/DME I-SNU	APP CRS	Rwy Ldg 10000
110.3	170°	TDZE 485
Chan 40		Apt Elev 501

ILS or LOC RWY 17R
LOUISVILLE MUHAMMAD ALI INTL (SDF)

RADAR required for procedure entry at CWAYN.
DME or RADAR required.

Simultaneous approach authorized. Circling Rwy 11 NA at night.
For inop ALS, increase S-LOC 17R Cat C/D visibility to RVR 6000.

MALSR

MISSED APPROACH: Climb to 1600 then climbing right turn to 4000 on heading 275° and on IIU VORTAC R-279 to DAMEN INT/24.5 DME and hold.

D-ATIS	LOUISVILLE APP CON	LOUISVILLE TOWER	GND CON
118.725	132.075 327.0	124.2 257.8	121.7 348.6

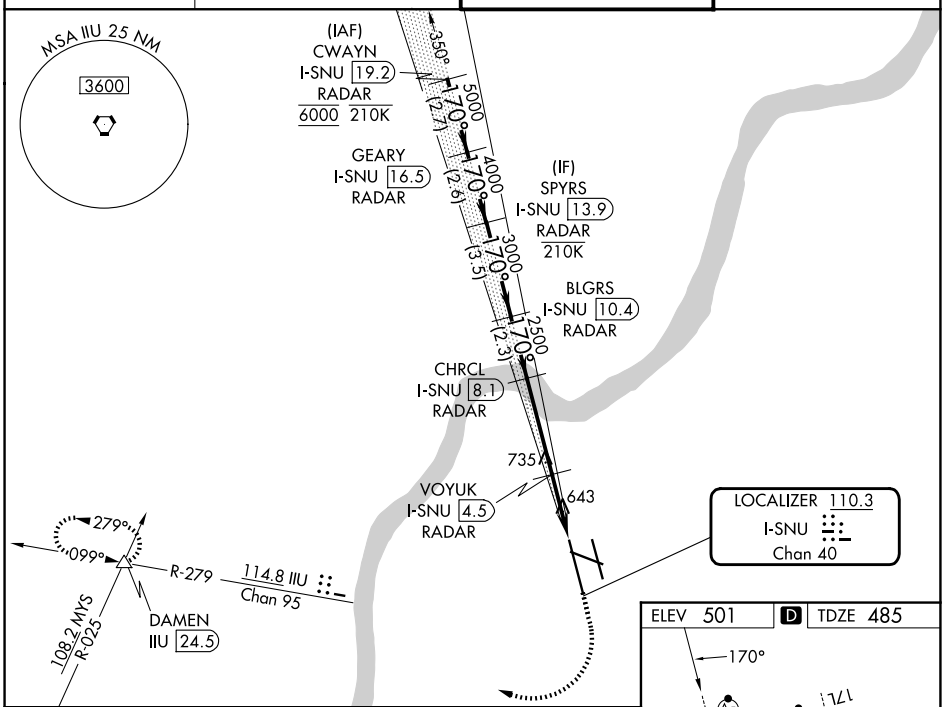

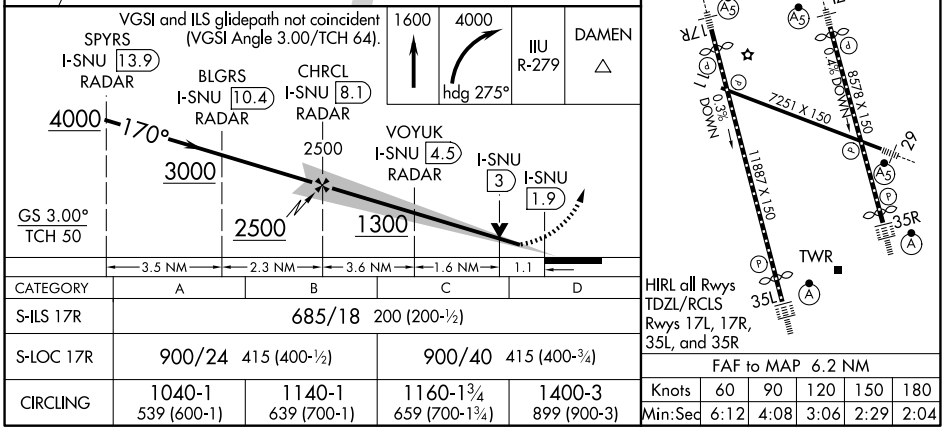

CATEGORY	A	B	C	D
S-ILS 17R	685/18 200 (200-½)			
S-LOC 17R	900/24 415 (400-½)		900/40 415 (400-¾)	
CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)	1400-3 899 (900-3)

FAF to MAP 6.2 NM

Knots	60	90	120	150	180
Min:Sec	6:12	4:08	3:06	2:29	2:04

SE-1, 14 MAY 2026 to 11 JUN 2026

SE-1, 14 MAY 2026 to 11 JUN 2026