


|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>99614</b><br><b>W35A</b> | APP CRS<br><b>352°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>7650</b><br><b>265</b><br><b>266</b> |
|--|------------------------|-----------------------------|---|



# RNAV (GPS) Y RWY 35

MANCHESTER BOSTON RGNL (MHT)



▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Nashua altimeter setting: increase LPV DA to 497 and all Cats visibility ¼ mile; increase LNAV/VNAV DA to 793 and all Cats visibility ½ mile; increase all MDA 40 feet and LNAV Cats C/D visibility ½ mile and Circling Cat C visibility ¼ mile. For inop ALSF, increase LNAV Cats A/B visibility to RVR 5500 and Cats C/D visibility to ¾ mile. VDP and Baro-VNAV NA when using Nashua altimeter setting. Helicopter visibility reduction below ¾ SM NA for LNAV/VNAV and LNAV. Inop table does not apply to LPV when using Nashua altimeter setting; for inop ALSF when using Nashua altimeter setting, increase LNAV Cats A/B visibility to RVR 6000 and LNAV Cats C/D to 1¾ mile.

ALSF-2  
  
 MISSED APPROACH:  
 Climb to 3000 direct BLUUM and hold, continue climb-in-hold to 3000.

|                       |  |  |                         |
|-----------------------|--|--|-------------------------|
| ATIS<br><b>119.55</b> | BOSTON APP CON<br><b>124.9 269.075</b> | MANCHESTER TOWER<br><b>121.3 239.025</b> | GND CON<br><b>121.9</b> |
|-----------------------|--|--|-------------------------|

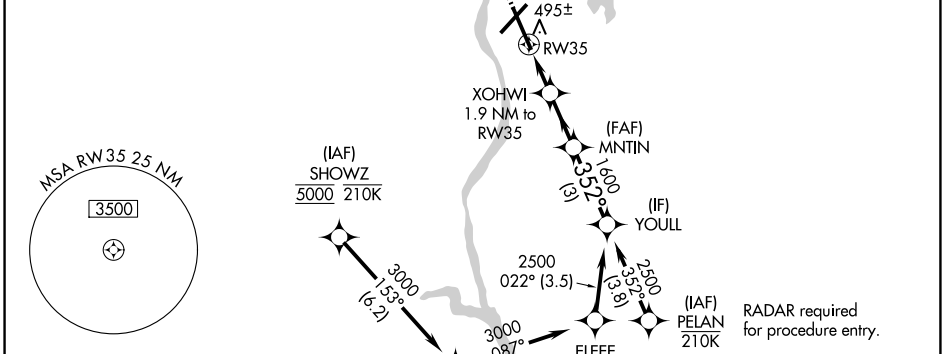

|          |          |          |
|----------|----------|----------|
| ELEV 266 | <b>D</b> | TDZE 265 |
|----------|----------|----------|

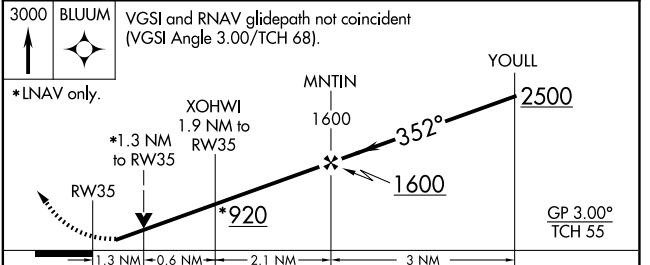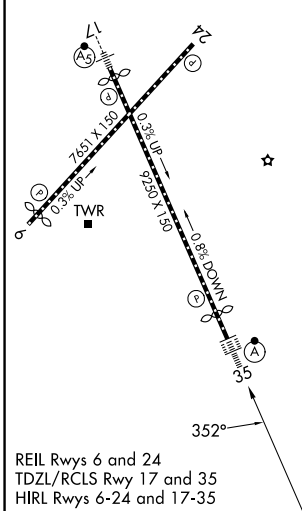

| CATEGORY     | A      | B           | C                    | D                       |
|--------------|--------|-------------|----------------------|-------------------------|
| LPV DA       |        | 465/18      | 200 (200-½)          |                         |
| LNAV/VNAV DA |        | 761/60      | 496 (500-1¼)         |                         |
| LNAV MDA     | 760/40 | 495 (500-¾) | 760/50               | 495 (500-1)             |
| CIRCLING     | 880-1  | 614 (700-1) | 980-2<br>714 (800-2) | 1100-2¾<br>834 (900-2¾) |

NE-1, 14 MAY 2026 to 11 JUN 2026

NE-1, 14 MAY 2026 to 11 JUN 2026