

APP CRS	Rwy Ldg	<b>12755</b>
<b>272°</b>	TDZE	<b>9</b>
	Apt Elev	<b>9</b>

# RNAV (RNP) Z RWY 27

MIAMI INTL (MIA)




RNP AR APCH-GPS.

▼ Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below 8°C or above 54°C. For inop ALS, increase RNP 0.11 visibility to RVR 4500 all Cats.

MALSRL

MISSED APPROACH: Climb to 800 then climbing right turn to 4000 direct BRBRA and hold, continue climb-in-hold to 4000.

D-ATIS	MIAMI APP CON	MIAMI TOWER	GND CON
<b>119.15</b>	<b>124.85 322.3</b>	<b>118.3 256.9</b>	<b>121.8 (8L/8R/12/26L/26R) 348.6</b> <b>127.5 (9/27/30)</b>

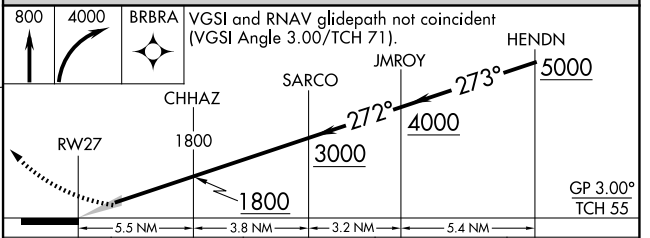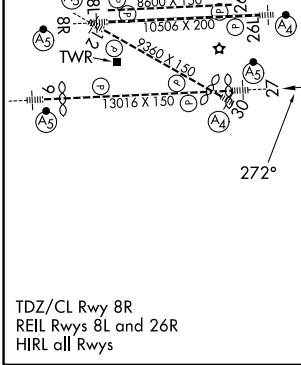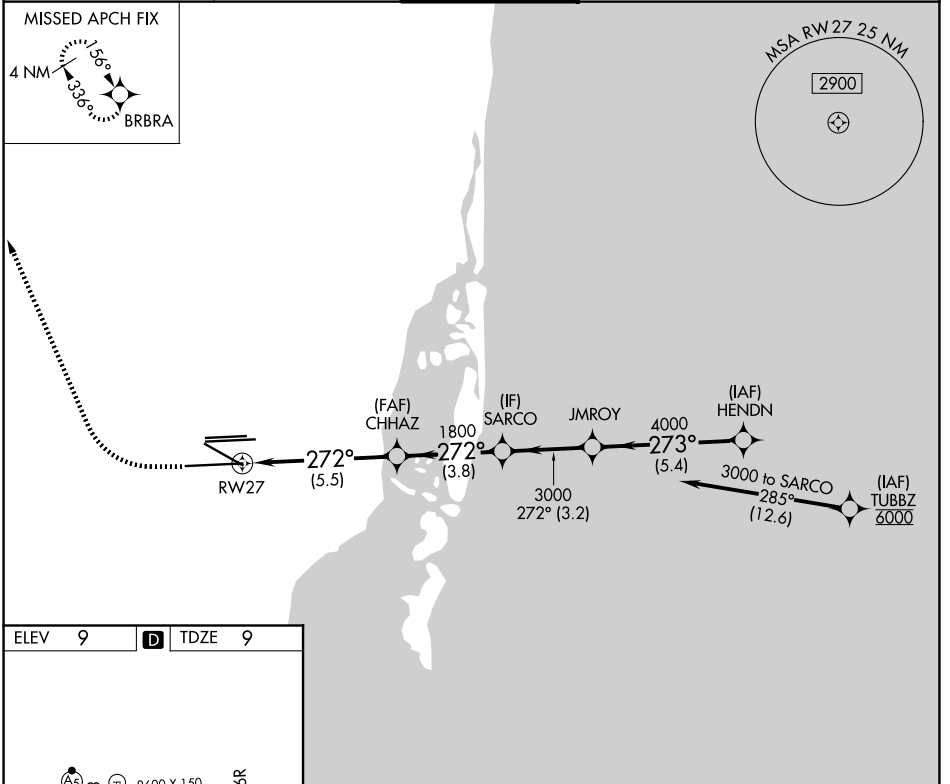

CATEGORY	A	B	C	D
RNP 0.11 DA		327/24	318 (400-½)	
RNP 0.30 DA		405/35	396 (400-¾)	

**AUTHORIZATION REQUIRED**

SE-3, 14 MAY 2026 to 11 JUN 2026

SE-3, 14 MAY 2026 to 11 JUN 2026