
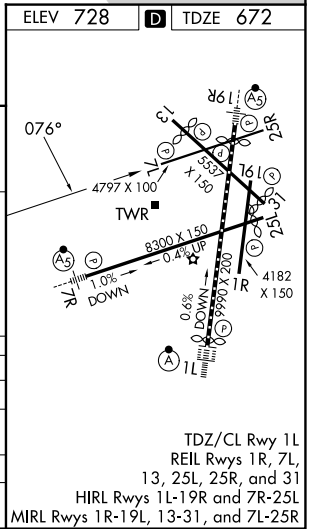
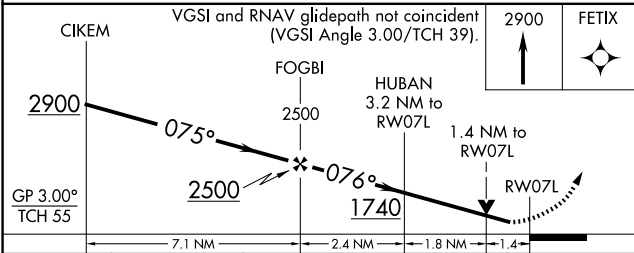


WAAS CH 42542 W07B	APP CRS 076°	Rwy Ldg TDZE Apt Elev	4797 672 728
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 7L

GENERAL MITCHELL INTL (MKE)

RNP APCH - GPS.		MISSED APPROACH: Climb to 2900 direct to FETIX and hold.	
<p>▼ Rwy 7L helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.</p>			
D-ATIS 126.4	MILWAUKEE APP CON 126.5 307.0	MILWAUKEE TOWER 124.575 269.05	GND CON 121.8 263.125

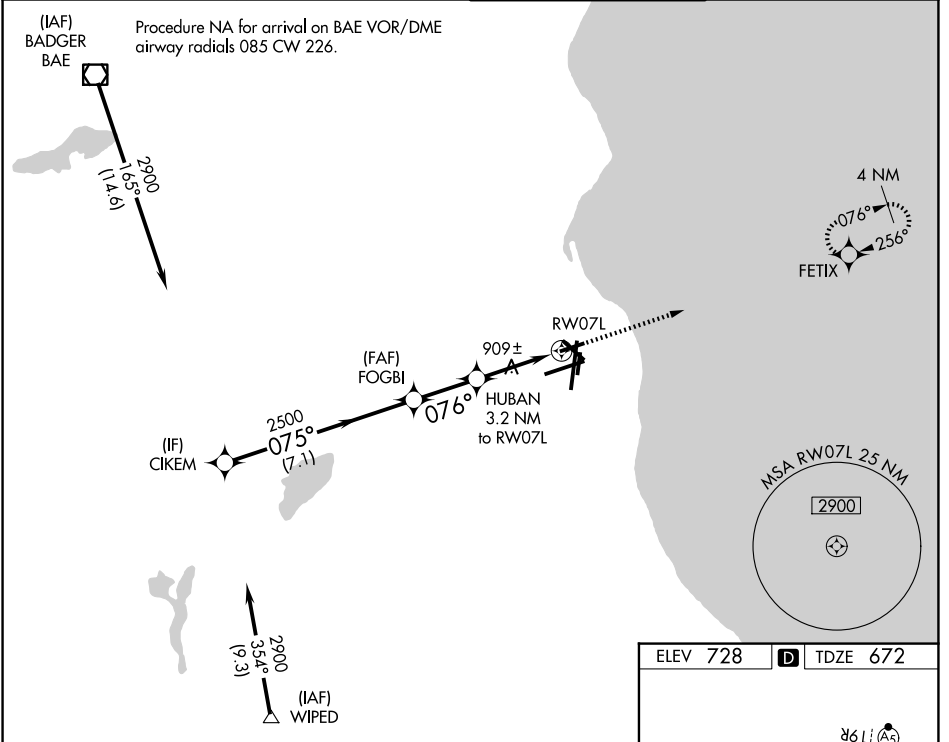

CATEGORY	A	B	C	D
LPV DA	922-1		250 (200-1)	
LNAV/VNAV DA	1118-1 3/8		446 (400-1 3/8)	
LNAV MDA	1160-1	488 (500-1)	1160-1 3/8	488 (500-1 3/8)
CIRCLING	1240-1	512 (600-1)	1240-1 1/2	1360-2 632 (700-2)