

|                        |                             |   |
|------------------------|-----------------------------|---|
| APP CRS<br><b>298°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>9501</b><br><b>3206</b><br><b>3206</b> |
|------------------------|-----------------------------|---|

# RNAV (RNP) RWY 30


MISSOULA MONTANA (MISO)

RNP AR APCH. RF required.

**⚠** For uncompensated Baro-VNAV systems, procedure NA below -21°C (-5°F) or above 43°C (109°F). When local altimeter setting not received, procedure NA.

**⚠** MISSED APPROACH: Climb to 11000 on track 297° to SUPPY and on track 292° to HEDVA and on track 297° to LOCIV, then right turn to NEYOC and on track 131° to ARLEE and hold. \*Missed approach requires minimum climb of 215 feet per NM to 5000.


|                       |  |   |                         |                         |
|-----------------------|--|---|-------------------------|-------------------------|
| ATIS<br><b>126.65</b> | SPOKANE APP CON *<br><b>124.9 298.95</b> | MISSOULA TOWER *<br><b>118.4 (CTAF) 377.175</b> | GND CON<br><b>121.9</b> | UNICOM<br><b>122.95</b> |
|-----------------------|--|---|-------------------------|-------------------------|

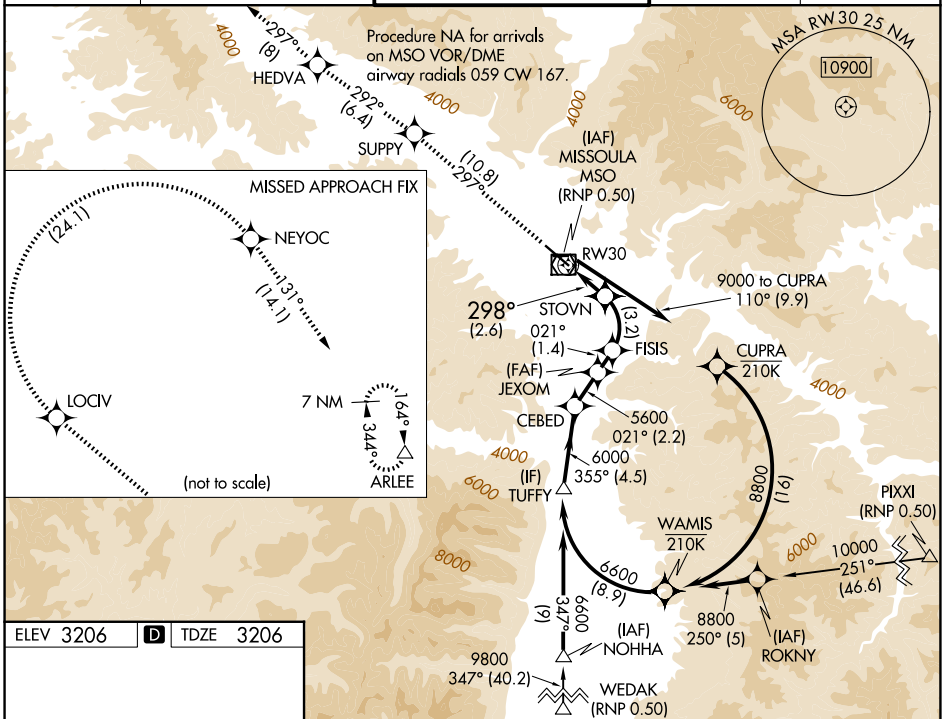

NW-1, 14 MAY 2026 to 11 JUN 2026

NW-1, 14 MAY 2026 to 11 JUN 2026

|           |          |           |
|-----------|----------|-----------|
| ELEV 3206 | <b>D</b> | TDZE 3206 |
|-----------|----------|-----------|

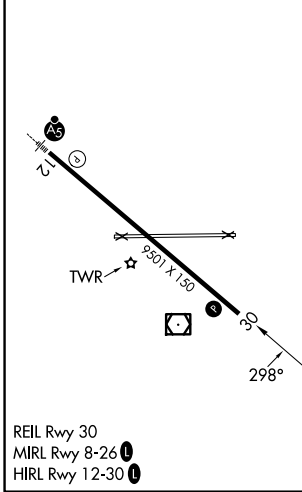

|                               |         |         |              |        |        |                    |
|-------------------------------|---------|---------|--------------|--------|--------|--------------------|
| 11000                         | SUPPY   | HEDVA   |              |        |        |                    |
| ↑                             | tr 297° | tr 292° |              |        |        |                    |
|                               | JEXOM   | CEBED   | TUFFY        |        |        |                    |
|                               | STOVN   | FISIS   | 5600         | 6600   |        |                    |
|                               | 4089    | 5135    | 5600         | 6000   |        |                    |
|                               | RW30    | 298°    | 021°         | 021°   | 355°   | GP 3.00%<br>TCH 50 |
|                               | 2.6 NM  | 3.2 NM  | 1.4 NM       | 2.2 NM | 4.5 NM |                    |
| CATEGORY                      | A       | B       | C            | D      |        |                    |
| RNP 0.30 DA *                 | 3524-1  |         | 318 (400-1)  |        |        |                    |
| RNP 0.30 DA                   | 3582-1¼ |         | 376 (400-1¼) |        |        |                    |
| <b>AUTHORIZATION REQUIRED</b> |         |         |              |        |        |                    |