




WAAS CH 56322 W23A	APP CRS 227°	Rwy Ldg 8995 TDZE 26 Apt Elev 26
--	------------------------	---

RNAV (GPS) Z RWY 23

NORFOLK INTL (ORF)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 2000 direct CALEY and hold.
V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility all Cats to 1 SM.	AS	

ATIS 127.15	NORFOLK APP CON 118.9 353.7	NORFOLK TOWER 120.8 257.8	GND CON 121.9
-----------------------	---------------------------------------	-------------------------------------	-------------------------

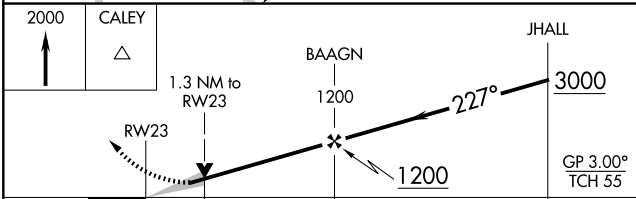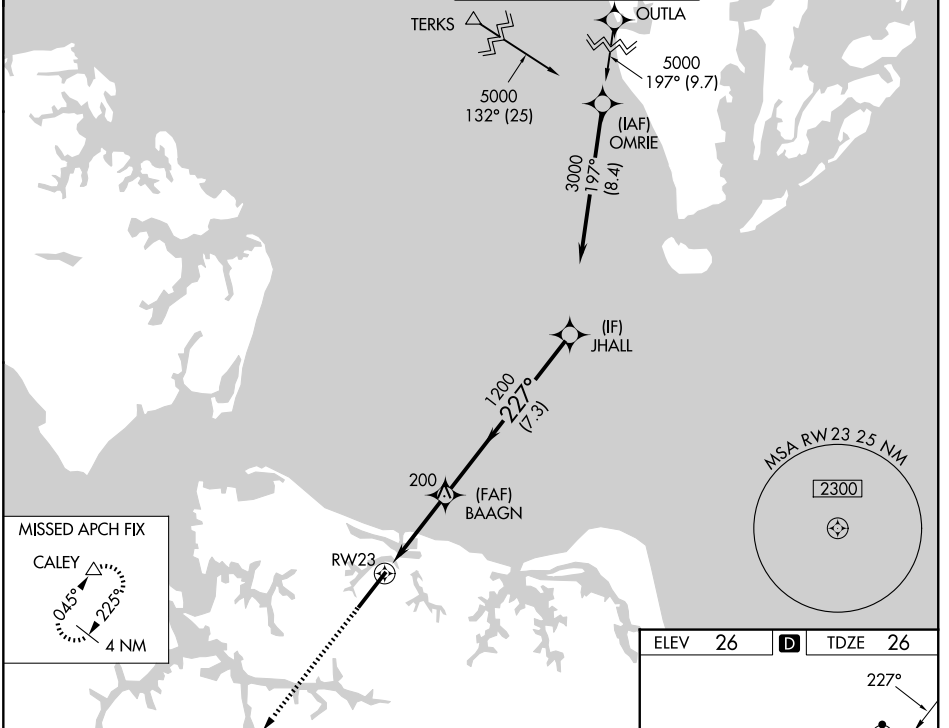

CATEGORY	A	B	C	D
LPV DA		226- ¹ / ₂	200 (200- ¹ / ₂)	
LNAV/VNAV DA		403- ⁵ / ₈	377 (400- ³ / ₈)	
LNAV MDA	480- ¹ / ₂	454 (500- ¹ / ₂)	480- ⁷ / ₈	454 (500- ⁷ / ₈)
CIRCLING	480-1 454 (500-1)	540-1 514 (600-1)	540-1 ¹ / ₂ 514 (600-1 ¹ / ₂)	900-2 ³ / ₄ 874 (900-2 ³ / ₄)

