

WAAS CH 40023 W09A	APP CRS 087°	Rwy Ldg 12000 TDZE 21 Apt Elev 36
----------------------------------------	------------------------	--------------------------------------------------------------


RNAV (GPS) Y RWY 9R

PHILADELPHIA INTL (PHL)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C (11°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.
▲ For inop ALS, increase LNAV/VNAV visibility all Cats to RVR 5000 and LNAV Cats C/D visibility to RVR 6000.


ALS-F-2 
 MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct OOD VORTAC and hold.

D-ATIS 133.4	PHILADELPHIA APP CON 124.35 319.15	PHILADELPHIA TOWER 118.5 327.05 (08/26, 09L/27R, 17/35) 135.1 327.05 (09R/27L)	GND CON 121.9 348.6
------------------------	----------------------------------------------	----------------------------------------------------------------------------------------------------	-------------------------------

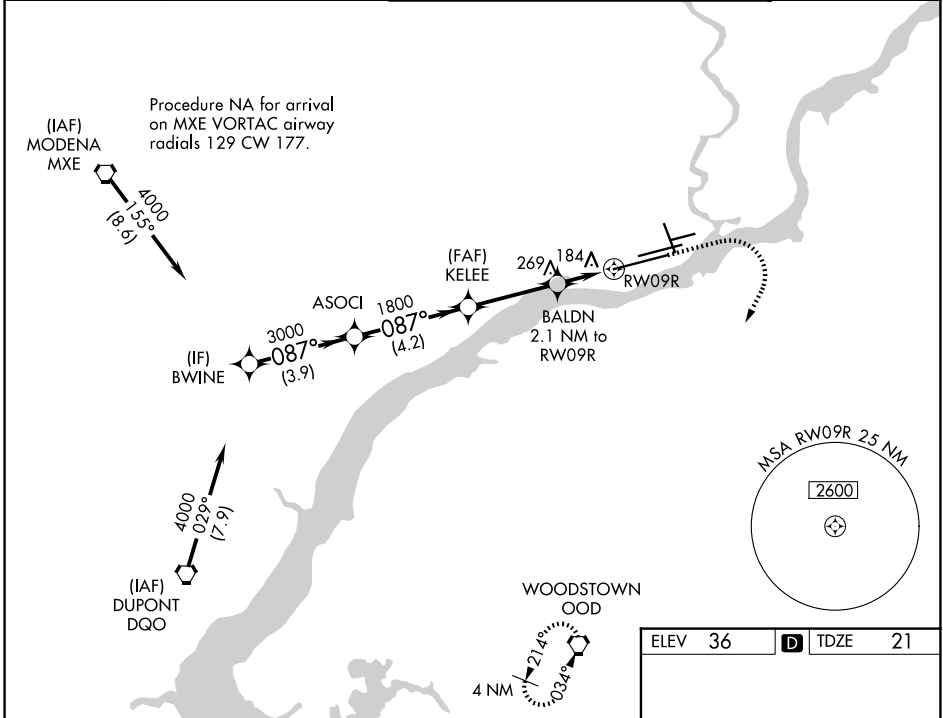


NE-4, 14 MAY 2026 to 11 JUN 2026

NE-4, 14 MAY 2026 to 11 JUN 2026

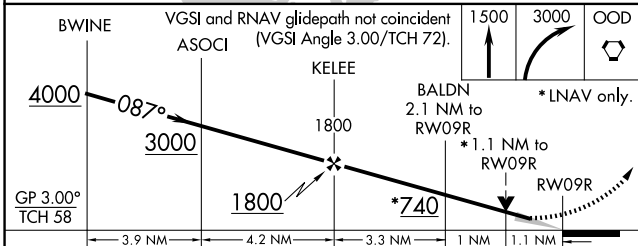

ELEV 36	D TDZE 21
----------------	-------------------------

CATEGORY	A	B	C	D
LPV DA		221/18	200 (200-½)	
LNAV/VNAV DA		346/30	325 (400-¾)	
LNAV MDA	440/24	419 (500-½)	440/40	419 (500-¾)
CIRCLING	540-1 504 (600-1)	640-1 604 (700-1)	640-1¾ 604 (700-1¾)	720-2¼ 684 (700-2¼)



TDZ/CL Rwy 9R
 HIRL all Rwys
 REIL Rwys 9L and 35