APP CRS	Rwy Ldg	8700
227°	TDZE	50
	Apt Elev	55

RNAV (RNP) Z RWY 23

RHODE ISLAND TF GREEN INTL (PVD)

For uncompensated Baro-VNAV systems, procedure NA below -15°C (5°F) or above 48°C (118°F). RF required. For inop MALSR, increase RNP 0.30 all Cats visibility to 1¼. GPS Required.

MALSR

Climb to 2500 on track 227° to WIKIT and right turn to STUFY and on track 013° to FOSTY and hold.

D-ATIS	PROVIDENCE APP CON ★	PROVIDENCE TOWER ★	GND CON
124.2	123.675 244.875	120.7 (CTAF) L 257.8	121.9 348.6

RADAR REQUIRED

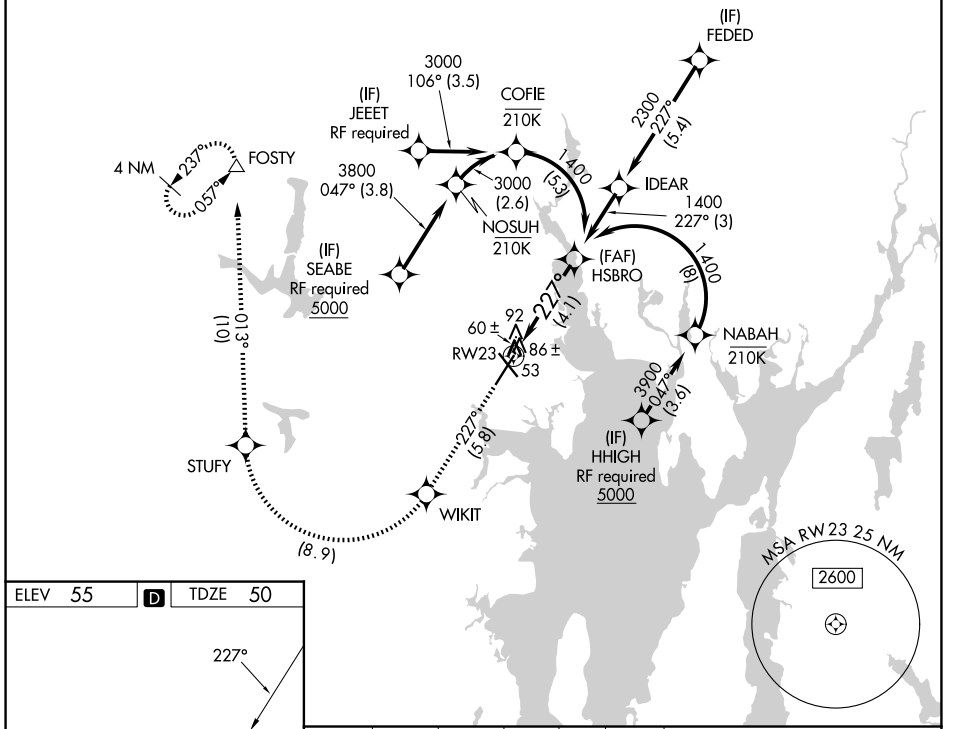

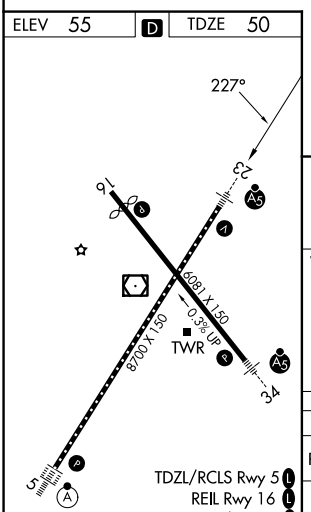

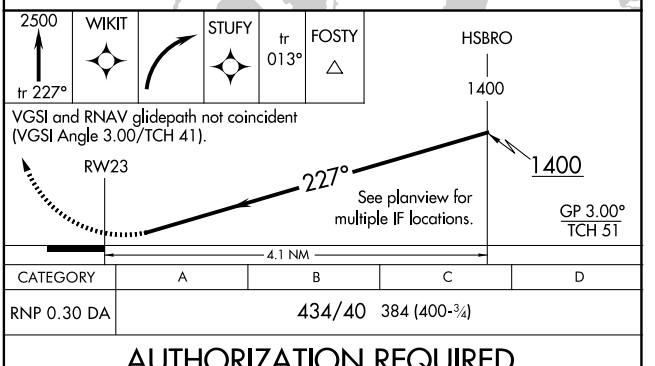

CATEGORY	A	B	C	D
RNP 0.30 DA	434/40 384 (400-¾)			

AUTHORIZATION REQUIRED

NE-1, 14 MAY 2026 to 11 JUN 2026