

| | | |
|------------------------|-----------------------------|--|
| APP CRS 347° | Rwy Ldg TDZE Apt Elev | 10011 4410 4415 |
|------------------------|-----------------------------|--|

RNAV (RNP) Z RWY 35L

RENO/TAHOE INTL (RNO)

RNP AR APCH - GPS, min RNP 0.30.
Authorization required.


A For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 35°C

MALSR





MISSED APPROACH: Climb to 11000 on track 347° to TAKLE and hold, continue climb-in-hold to 11000. # Missed approach requires minimum climb of 216 feet per NM to 7200. *Missed approach requires minimum climb of 301 feet per NM to 7200.

| | | | |
|------------------------------|--|----------------------------------|-------------------------------|
| D-ATIS 135.8 363.0 | NORCL APP CON 119.2 279.55 126.3 353.9 | RENO TOWER 118.7 257.8 | GND CON 121.9 348.6 |
|------------------------------|--|----------------------------------|-------------------------------|

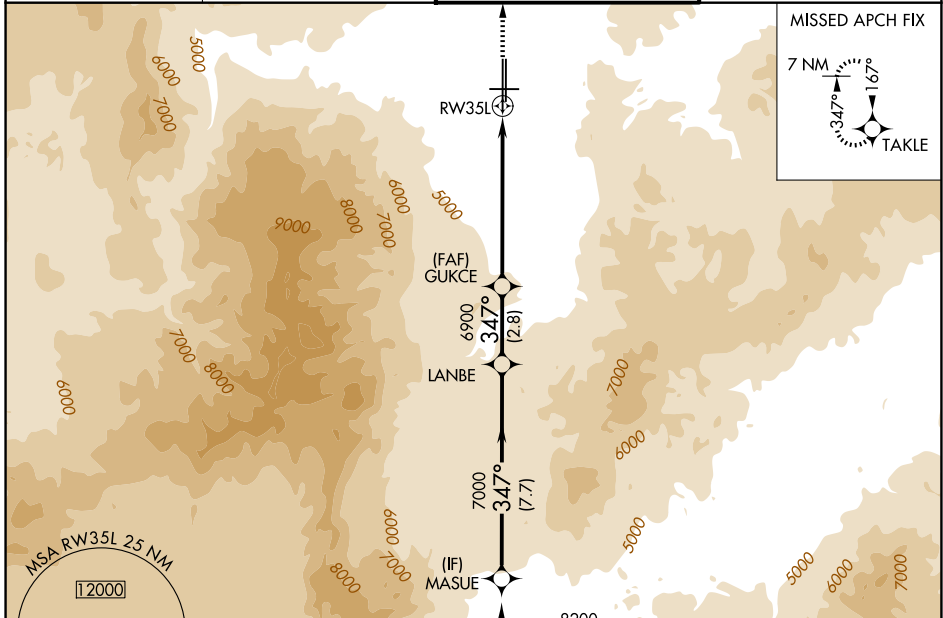

| | | |
|------------------------------|----------|-----------|
| ELEV 4415 | D | TDZE 4410 |
| REIL Rwy 8, 17L, 26, and 35R | | |
| HIRL Rwy 17R-35L and 17L-35R | | |
| MIRL Rwy 8/26 | | |

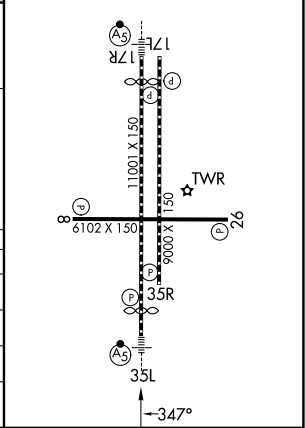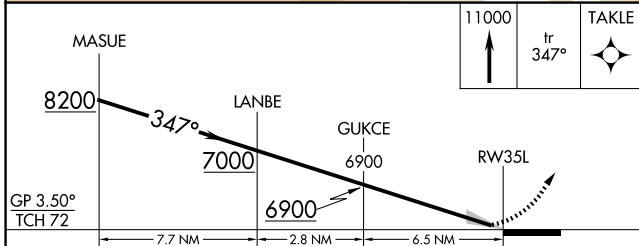

| CATEGORY | A | B | C | D |
|---------------|---|-----------|----------------|---|
| RNP 0.10 DA * | | 4753-5/8 | 343 (400-5/8) | |
| RNP 0.20 DA # | | 5193-13/4 | 783 (800-13/4) | |
| RNP 0.30 DA | | 5353-2 | 943 (1000-2) | |

AUTHORIZATION REQUIRED