

LOC/DME I-LDZ 108.9 Chan 26	APP CRS 123°	Rwy Ldg TDZE Apt Elev	8956 541 617
--	------------------------	-----------------------------	---

ILS or LOC RWY 12L

ST LOUIS LAMBERT INTL (STL)


RADAR and DME required.

For inop ALS, increase S-ILS 12L Cat E visibility to RVR 4000 and S-LOC 12L Cat E visibility to 1 1/2 SM. Simultaneous approach authorized with Rwy 11. Simultaneous approach authorized with Rwy 12R requires use of vertical guidance; maintain last altitude until established on the glideslope.


ALSF-2

MISSED APPROACH: Climb to 2500 then climbing left turn to 3000 direct TOY VORTAC and hold.

D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 120.05 284.6	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (11/29)
----------------------------------	---	--	---

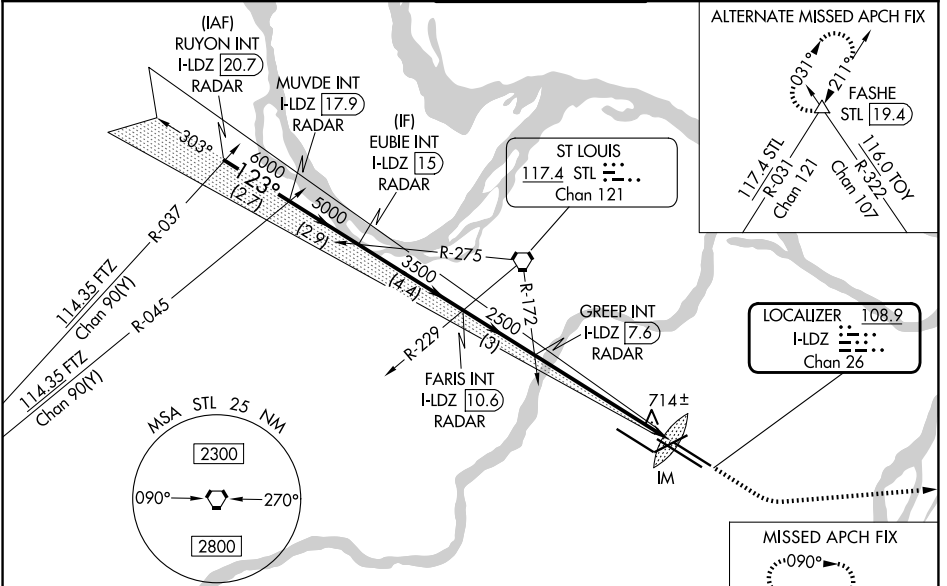


ELEV 617	D	TDZE 541
----------	----------	----------

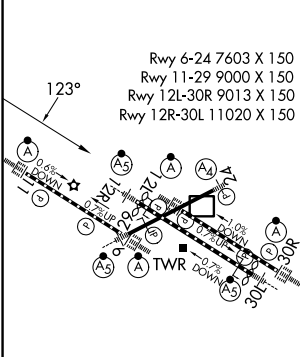

HIRL all rwys
TDZL/RCLS Rwws 11, 12L, 12R, 29, and 30R

FAF to MAP 5.9 NM

Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

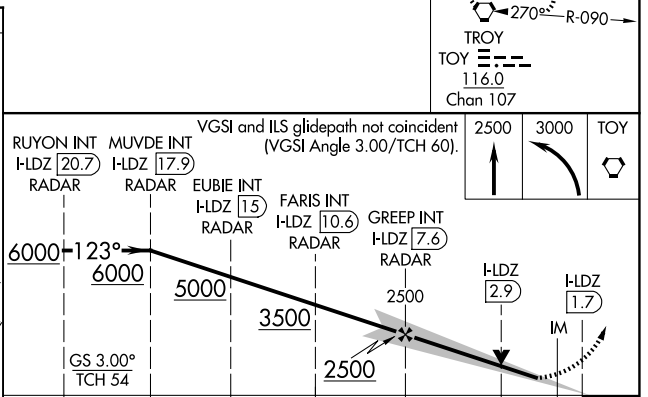

CATEGORY	A	B	C	D	E
S-ILS 12L	741/18		200 (200-1/2)	741/24 200 (200-1/2)	
S-LOC 12L	980/24	439 (400-1/2)	980/40 439 (400-3/4)	980/50	439 (400-1)

NC-3, 14 MAY 2026 to 11 JUN 2026

NC-3, 14 MAY 2026 to 11 JUN 2026