


APP CRS	Rwy Ldg 10800
007°	TDZE 11
	Apt Elev 26


RNAV (RNP) Z RWY 1L

TAMPA INTL (TPA)

RNP AR APCH - GPS.			ALSF-2	MISSED APPROACH: Climb to 2000 direct MERRA and hold.
▼ For uncompensated Baro-VNAV systems, procedure NA below 4°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.13 all Cats visibility to 4500 RVR.			(A)	
D-ATIS 126.45	TAMPA APP CON 118.5 307.175	TAMPA TOWER 119.5 269.4	GND CON 121.7 269.4	

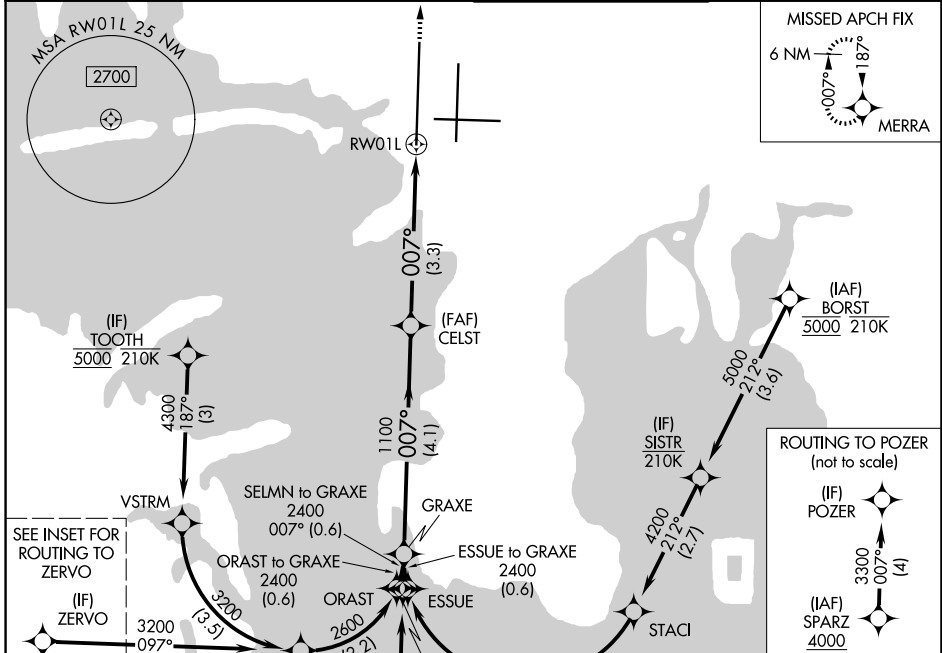


ELEV 26	TDZE 11
REIL Rwy 1R	
HIRL Rwys 1L-19R, 1R-19L, and 10-28	
TDZL/RCLS Rwys 1L and 19L	

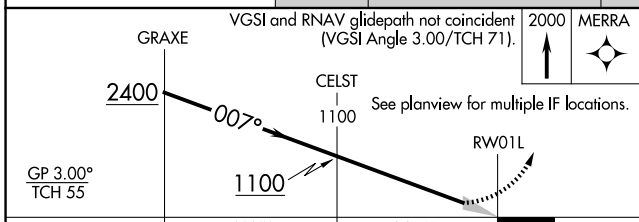

CATEGORY	A	B	C	D
RNP 0.13 DA	299/24	288 (300-½)	305/24	324/24
RNP 0.30 DA	405/35		394 (400-⅙)	313 (300-½)

AUTHORIZATION REQUIRED

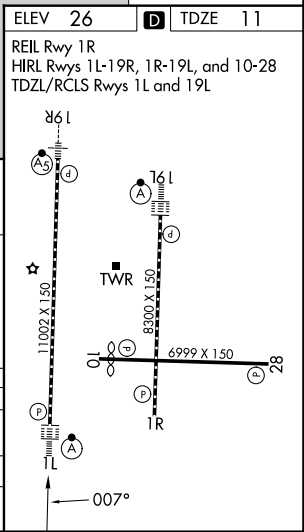

SE-3, 14 MAY 2026 to 11 JUN 2026

SE-3, 14 MAY 2026 to 11 JUN 2026