


|                           |                        |                        |
|---------------------------|------------------------|------------------------|
| LOC I-TVC<br><b>110.7</b> | APP CRS<br><b>279°</b> | Rwy Ldg<br><b>7016</b> |
|                           |                        | TDZE<br><b>616</b>     |
|                           |                        | Apt Elev<br><b>624</b> |

# ILS or LOC RWY 28

CHERRY CAPITAL (TVC)

|   |           |   |
|---|-----------|---|
| RNP APCH - GPS.<br>Aircraft not GPS equipped - RADAR required for procedure entry.  | MALSR<br> | MISSED APPROACH: Climb to 1100 then climbing left turn to 3000 direct TVC VOR/DME and hold, continue climb-in-hold to 3000. |
| S-LOC 28 minimums: For inop ALS, increase S-LOC 28 Cats C and D visibility to 2 1/2 SM. AYATA FIX minimums: For inop ALS, increase S-LOC 28 Cats C and D visibility to 2 SM.<br>-21°C |           |   |




|                        |  |  |                               |                         |
|------------------------|--|--|-------------------------------|-------------------------|
| ATIS<br><b>119.175</b> | MINNEAPOLIS CENTER<br><b>132.9 338.3</b> | TRAVERSE CITY TOWER *<br><b>124.2 (CTAF) 348.6</b> | GND CON<br><b>121.8 348.6</b> | UNICOM<br><b>122.95</b> |
|------------------------|--|--|-------------------------------|-------------------------|

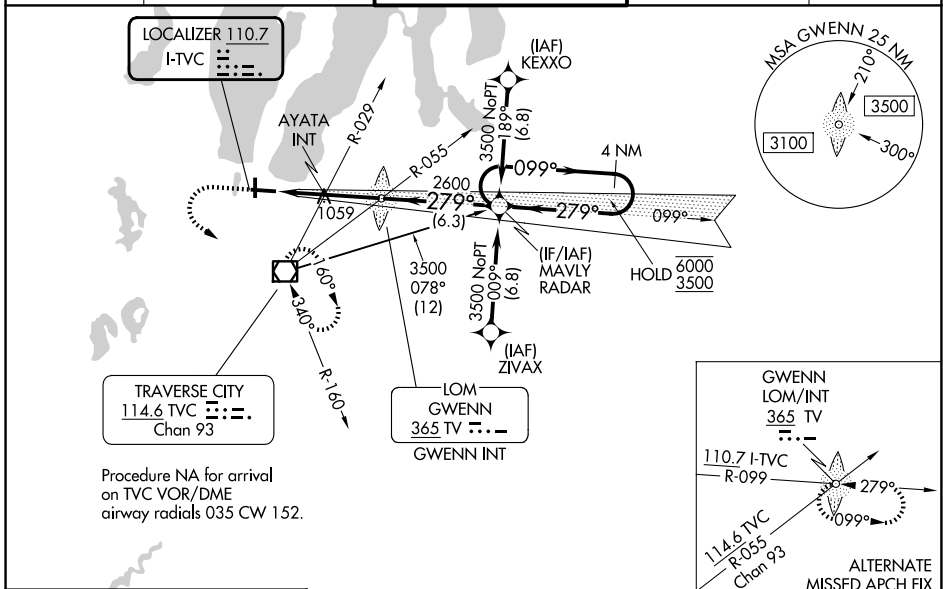

EC-1, 14 MAY 2026 to 11 JUN 2026

EC-1, 14 MAY 2026 to 11 JUN 2026

|          |          |          |
|----------|----------|----------|
| ELEV 624 | <b>D</b> | TDZE 616 |
|----------|----------|----------|

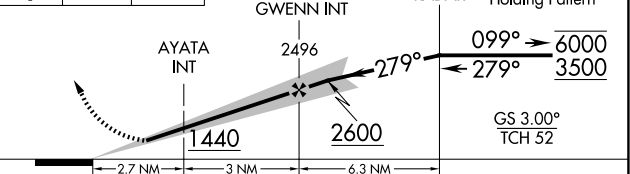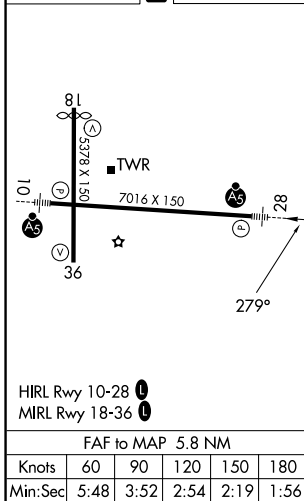

|  |                           |                           |                               |                         |
|--|---------------------------|---------------------------|-------------------------------|-------------------------|
| CATEGORY   | A                         | B                         | C                             | D                       |
| S-ILS 28   | 816-1/2 200 (200-1/2)     |                           |                               |                         |
| S-LOC 28   | 1440-1/2<br>824 (900-1/2) | 1440-3/4<br>824 (900-3/4) | 1440-1 7/8                    | 824 (900-1 7/8)         |
| CIRCLING   | 1440-1 1/4                | 816 (900-1 1/4)           | 1440-2 1/2<br>816 (900-2 1/2) | 1720-3<br>1096 (1100-3) |
| AYATA FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED) |                           |                           |                               |                         |
| S-LOC 28   | 1320-1/2                  | 704 (700-1/2)             | 1320-1 5/8                    | 704 (700-1 5/8)         |
| CIRCLING   | 1320-1                    | 696 (700-1)               | 1420-2 1/4<br>796 (800-2 1/4) | 1720-3<br>1096 (1100-3) |