

WAAS CH 53733 W36A	APP CRS 005°	Rwy Ldg TDZE Apt Elev	5108 624 624
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 36


CHERRY CAPITAL (TVC)

RNP APCH - GPS.

⚠ Baro-VNAV NA when using ACB altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received use ACB altimeter setting: increase all DA 51 feet and all MDA 60 feet, increase LNAV/VNAV all Cats and Circling Cat C visibilities ¼ SM, and increase LPV all Cats, LNAV Cat C/D and Circling Cat D visibilities ½ SM. Helicopter visibility reduction below ¼ SM NA.

MISSED APPROACH:
Climb to 1400 then climbing right turn to 3000 direct TIDDU and hold.


ATIS 119.175	MINNEAPOLIS CENTER 132.9 338.3	TRAVERSE CITY TOWER * 124.2(CTAF) 0 348.6	GND CON 121.8 348.6	UNICOM 122.95
------------------------	--	---	-------------------------------	-------------------------

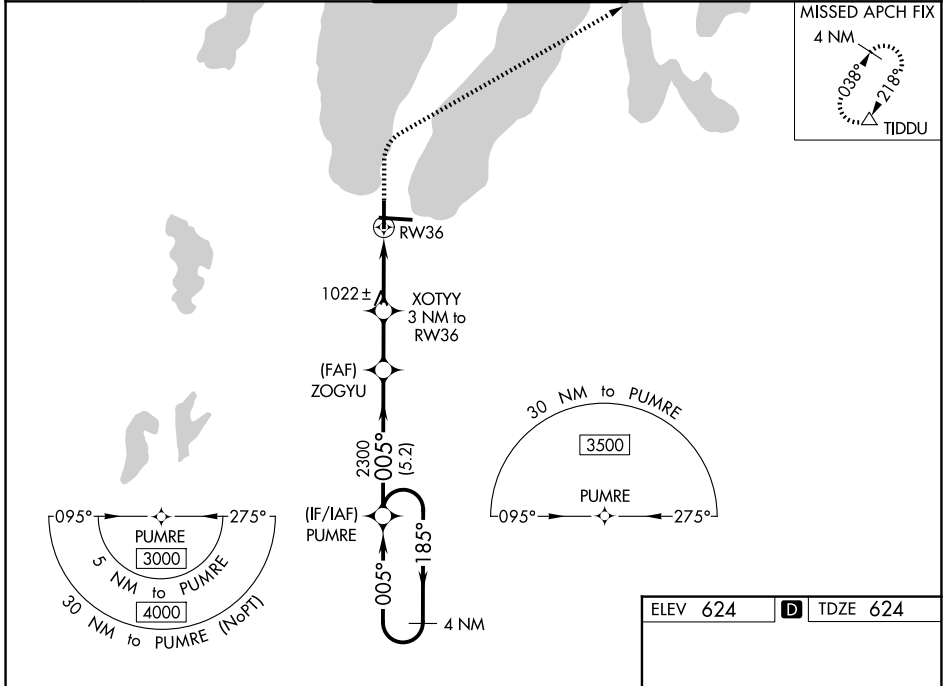


EC-1, 14 MAY 2026 to 11 JUN 2026

EC-1, 14 MAY 2026 to 11 JUN 2026

4 NM VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 53).
Holding Pattern



ELEV 624	D TDZE 624
----------	-------------------

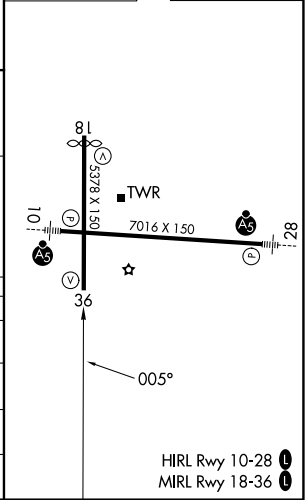

CATEGORY	A	B	C	D
LPV DA	899-7/8		275 (300-7/8)	
LNAV/VNAV DA	1146-1 1/4		522 (600-1 1/4)	
LNAV MDA	1280-1 656 (700-1)		1280-1 7/8 656 (700-1 7/8)	
CIRCLING	1280-1 656 (700-1)		1500-2 1/2 876 (900-2 1/2) 1720-3 1096 (1100-3)	

HIRL Rwy 10-28 **0**
MIRL Rwy 18-36 **0**