


APP CRS	Rwy Ldg	7604
274°	TDZE	1068
	Apt Elev	1099

RNAV (RNP) Z RWY 27


YAKIMA AIR TRML/MCALLISTER FLD (YKM)

▼ For uncompensated Baro-VNAV systems, procedure NA below -17°C (2°F) or above 54°C (130°F). RF required. GPS required. Missed approach requires RNP less than 1.0. For inop ALS increase *RNP 0.10 DA visibility all Cts to RVR 4500 and RNP 0.30 DA visibility all Cts to 1/2 SM. DATVE transition NA when R-6714 A, C, D active.

MALSRS 

MISSED APPROACH: Climb to 5100 on track 274° to YEPCU left turn to JOPDI left turn to ZEMUN left turn to MUDLE and hold.
* Missed approach requires a minimum climb of 215 feet per NM to 4300.

ATIS	SPOKANE APP CON*	YAKIMA TOWER*	GND CON	UNICOM
125.25	123.8 263.15	133.25 (CTAF) 0 257.8	121.9	122.95

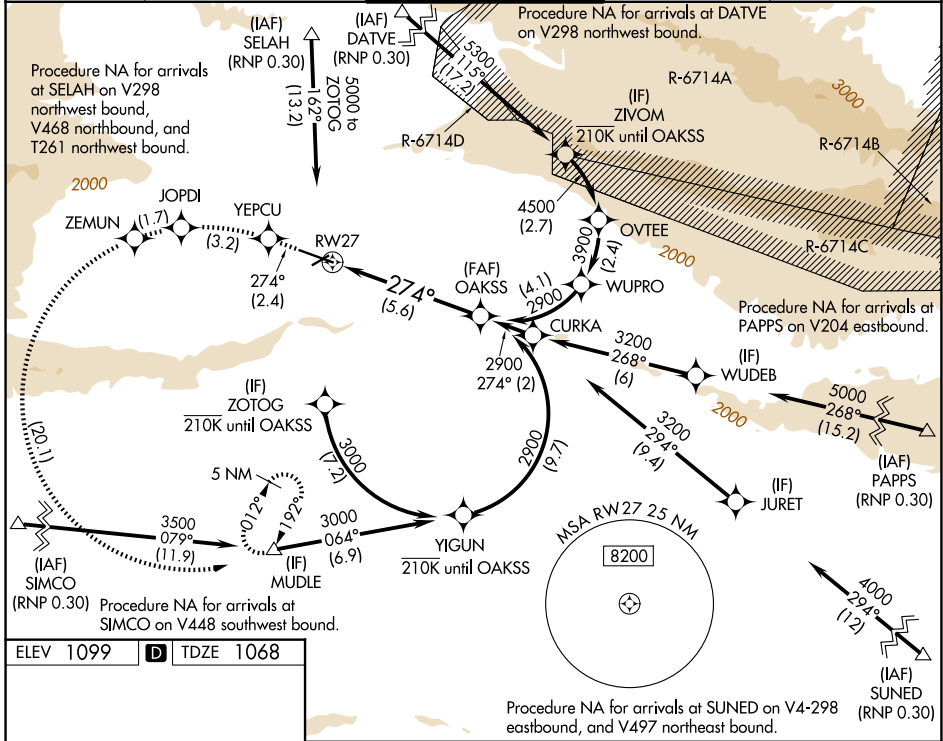

ELEV 1099	D	TDZE 1068
-----------	----------	-----------

MIRS Rwy 4-22
HIRL Rwy 9-27 **D**
REIL Rws 4, 9, and 22

5100	YEPCU	JOPDI	ZEMUN	MUDLE	OAKSS
↑	✦	↶	↶	△	△
tr 274°					2900
See planview for multiple IF locations.					
RW27					2900
274°					GP 3.00°
5.6 NM					TCH 57
CATEGORY	A	B	C	D	
RNP 0.10 DA*		1348/24	280 (300-1/2)		
RNP 0.30 DA		1468/45	400 (400-7/8)		
AUTHORIZATION REQUIRED					

NW-1, 14 MAY 2026 to 11 JUN 2026

NW-1, 14 MAY 2026 to 11 JUN 2026