
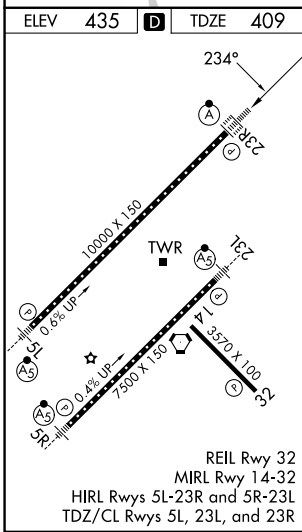


# RNAV (GPS) Y RWY 23R

RALEIGH-DURHAM INTL (RDU)

WAAS <b>CH 45613</b> <b>W23A</b>	APP CRS <b>234°</b>	Rwy Ldg <b>10000</b> TDZE <b>409</b> Apt Elev <b>435</b>
--	------------------------	--

RNP APCH - GPS		ALSF-2		MISSED APPROACH: Climb to 1000 then climbing right turn to 2200 direct DUHAM and hold.	
<p>Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.</p> <p>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cat C/D visibility to 1½ NM.</p>					
D-ATIS <b>123.8</b>	RALEIGH APP CON <b>127.675 307.9</b>	<b>RALEIGH TOWER</b> <b>127.45 257.8</b>	GND CON <b>121.9 348.6</b>	CLNC DEL <b>120.1</b>	CPDLC

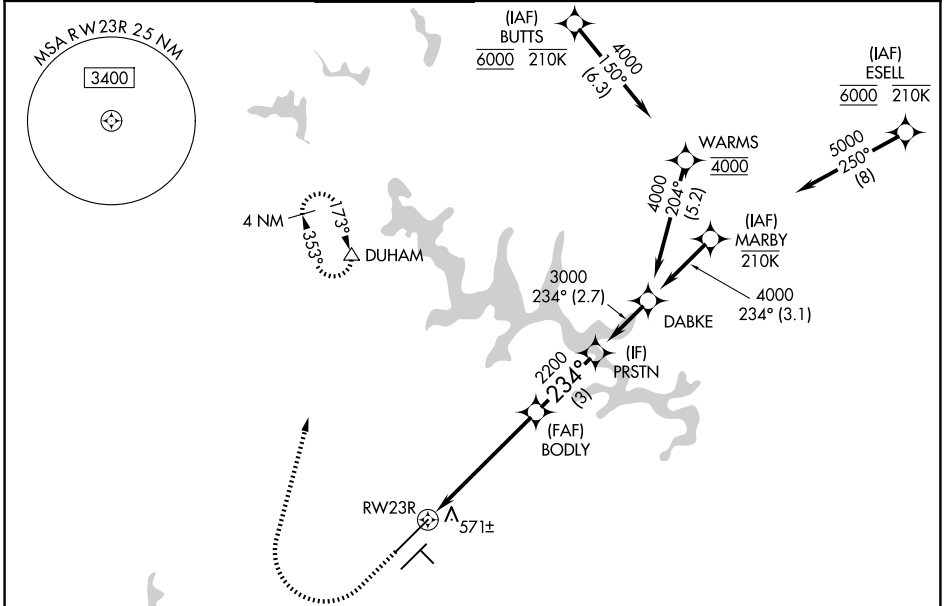

ELEV 435	<b>D</b>	TDZE 409		
<p>1000 2200 DUHAM</p> <p>↑ ↘ △</p> <p>VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69).</p>				
<p>BODY PRSTN DABKE MARBY</p> <p>2200 3000 4000 5000</p> <p>GP 3.00° TCH 55</p>				
<p>1.6 NM 3.9 NM 3 NM 2.7 NM 3.1 NM</p>				
CATEGORY	A	B	C	D
LPV DA		609/18	200 (200-½)	
LNAV/VNAV DA		826/40	417 (400-¾)	
LNAV MDA	980/24	571 (600-½)	980-1¼	571 (600-1¼)
CIRCLING	980-1	545 (600-1)	1020-1½ 585 (600-1½)	1180-2½ 745 (800-2½)

SE-2, 14 MAY 2026 to 11 JUN 2026

SE-2, 14 MAY 2026 to 11 JUN 2026