


LOC I-SPI <b>109.5</b>	APP CRS <b>043°</b>	Rwy Ldg TDZE Apt Elev	<b>7927</b> <b>592</b> <b>598</b>
---------------------------	------------------------	-----------------------------	-----------------------------------------


# ILS or LOC RWY 4

ABRAHAM LINCOLN CAPITAL (SPI)

ADF Required.		MALSR		MISSED APPROACH: Climb to 1500 then climbing left turn to 2300 direct HUSKK LOM and hold.	
<p>⚠ When local altimeter setting not received, use Lincoln altimeter setting and increase all DA 57 feet, all MDA 60 feet, increase S-LOC and Circling Cat C/D visibility ¼ mile. For inop ALS when using Lincoln altimeter setting, increase S-LOC 4 Cats C and D visibility to 1 3/8 SM. ASR *RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Lincoln altimeter setting).</p>		<p>ATIS      SAINT LOUIS APP CON</p> <p><b>127.65 270.1</b>      <b>126.15 323.0</b></p>		<p>SPRINGFIELD TOWER ★</p> <p><b>121.3 (CTAF) 257.8</b></p>	
<p>GND CON</p> <p><b>121.9 348.6</b></p>		<p>UNICOM</p> <p><b>122.95</b></p>			

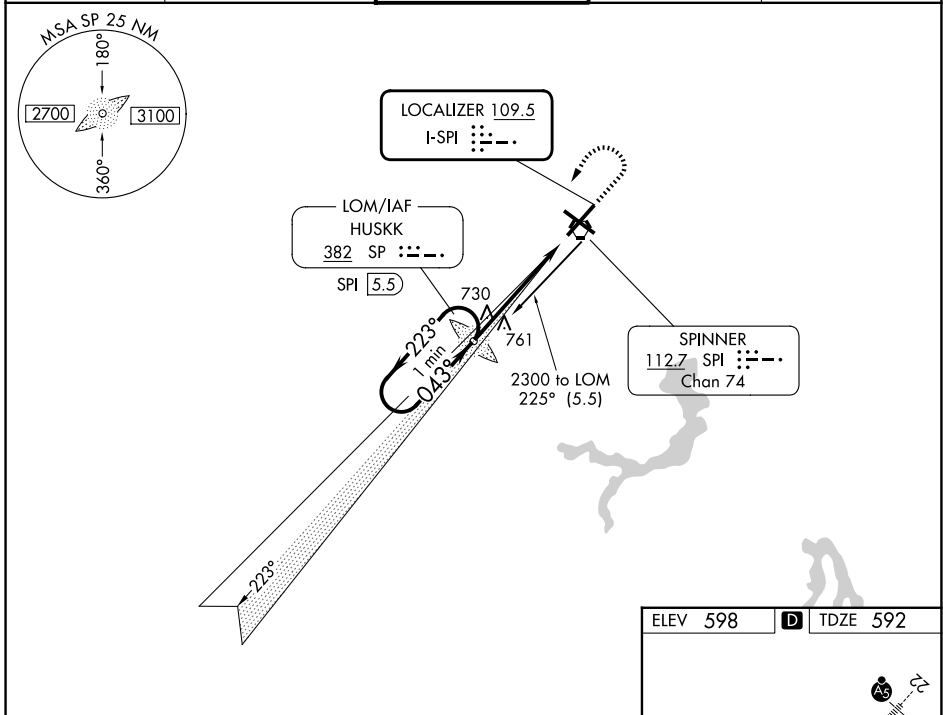

One Minute Holding Pattern	SP LOM SPI 5.5	1500	2300	SP
2300 ← 223°	2297	↑	↶	⊙
GS 3.00°	2300			
TCH 56				
		-5.1 NM		
CATEGORY	A	B	C	D
S-ILS 4		* 792/24 200 (200-1/2)		
S-LOC 4	1020/24	428 (500-1/2)	1020/40	428 (500-3/4)
CIRCLING	1040-1 442 (500-1)	1100-1 502 (600-1)	1360-2 1/4 762 (800-2 1/4)	1380-2 1/2 782 (800-2 1/2)

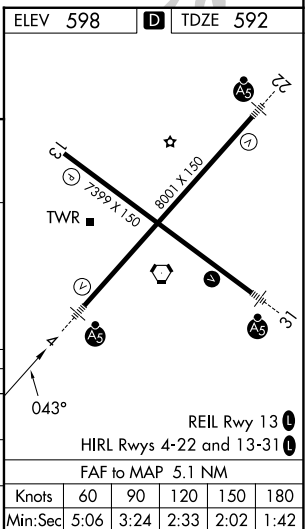

EC-3, 14 MAY 2026 to 11 JUN 2026

EC-3, 14 MAY 2026 to 11 JUN 2026