

LOC/DME I-TLK	APP CRS	Rwy Ldg	9093
111.5	134°	TDZE	13
Chan 52		Apt Elev	13


ILS or LOC RWY 13L

JOHN F KENNEDY INTL (JFK)

RNAV 1-GPS or RADAR required for procedure entry.
 From COVIR, KMCHI, BUZON; RNAV-1 GPS required.
 For inop ALS, increase S-LOC 13L Cat C/D visibility to 1½ SM.



ALSF-2
 MISSED APPROACH: Climb to 600 then climbing left turn to 4000 direct DPK VOR/DME and hold.

D-ATIS (SW)	D-ATIS (NE)	NEW YORK APP CON	KENNEDY TOWER	GND CON
115.4	117.7 128.725	128.125 269.0	119.1 281.55 (4R/22L and 13L/31R) 123.9 281.55 (4L/22R and 13R/31L)	121.9 348.6

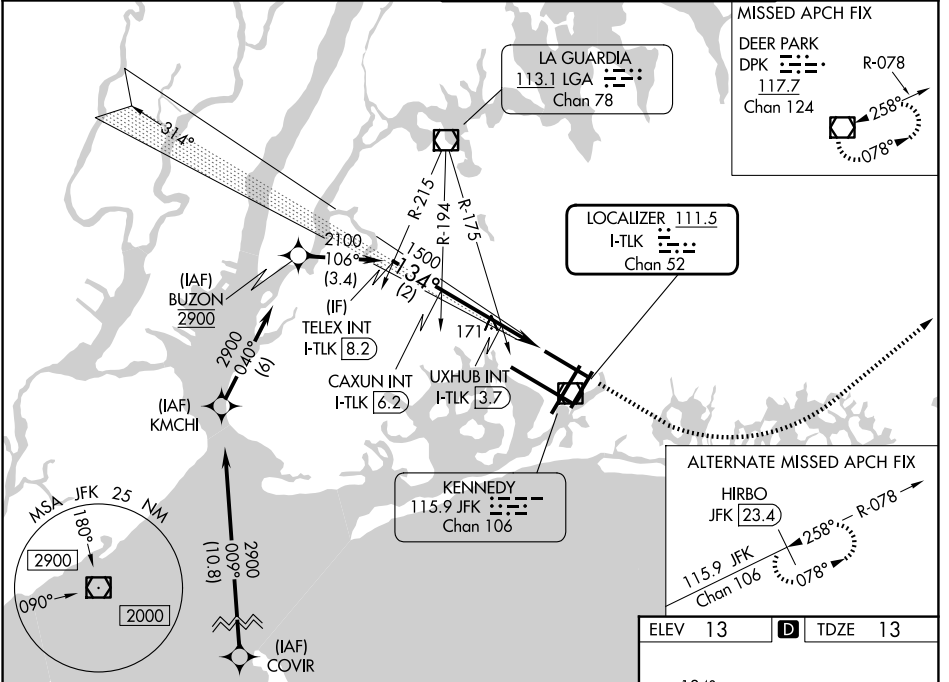

NE-2, 14 MAY 2026 to 11 JUN 2026

NE-2, 14 MAY 2026 to 11 JUN 2026

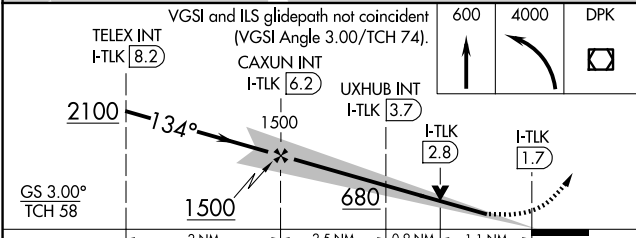

CATEGORY	A	B	C	D
S-ILS 13L	213/18		200 (200-½)	
S-LOC 13L	680-24	667 (700-½)	680-1½	667 (700-1½)
CIRCLING	680-1	667 (700-1)	700-2 687 (700-2)	700-2¼ 687 (700-2¼)
UXHUB FIX MINIMUMS				
S-LOC 13L	440/24	427 (500-½)	440/40	427 (500-¾)
CIRCLING	640-1	627 (700-1)	700-2 687 (700-2)	700-2¼ 687 (700-2¼)

ELEV	13	TDZE	13		
RLLS Rwy's 13L and 13R HIRL all Rwy's TDZ/CL Rwy's 4L, 4R, 13L, 22L and 31R FAF to MAP 4.5 NM					
Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30