


| | | | |
|----------------------|------------------------|-----------------------------|---|
| LOM IA 329 | APP CRS 280° | Rwy Ldg TDZE Apt Elev | 9129 588 592 |
|----------------------|------------------------|-----------------------------|---|


NDB RWY 28

NIAGARA FALLS INTL (IAG)

⚠ Circling Rwy 6 NA at night.
⚠ Rwy 28 helicopter visibility reduction below RVR 4000 NA.
 Circling NA for Cat E southeast of Rwy 6-24.
 For inop ALS, increase visibility Cats A/B to RVR to 5500, Cats C/D/E to 1 3/4 SM.

MALSR  MISSED APPROACH: Climb to 1600 on heading 294° then climbing right turn to 3200 direct KATHI LOM and hold, continue climb-in-hold to 3200.

| | | | | |
|----------------------------|---------------------------------------|--|-------------------------------|-------------------------|
| ATIS 120.8 269.4 | BUFFALO APP CON 126.5 317.6 | NIAGARA TOWER ★ 118.5 (CTAF) 0 349.0 | GND CON 125.3 275.8 | UNICOM 122.95 |
|----------------------------|---------------------------------------|--|-------------------------------|-------------------------|

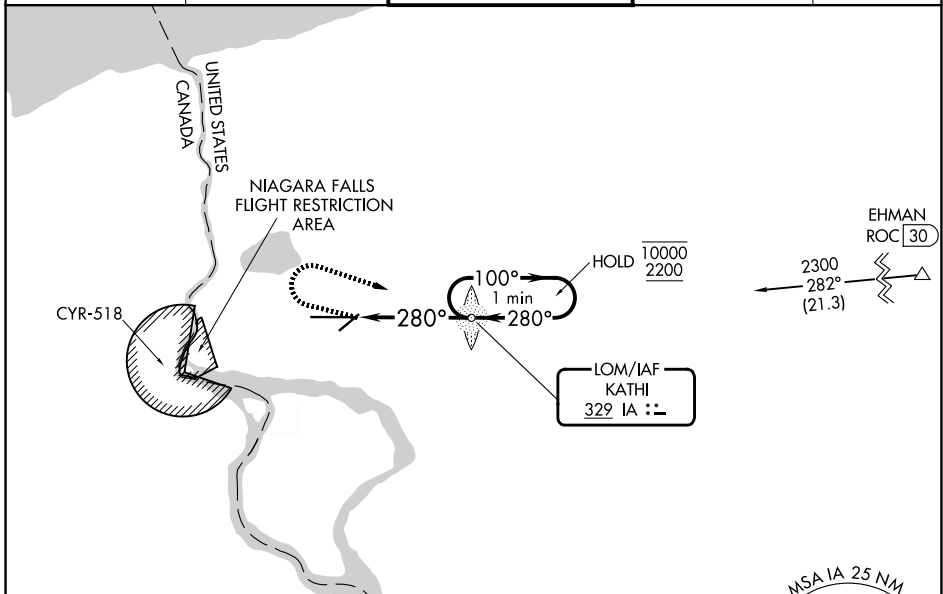

| | | |
|----------|----------|----------|
| ELEV 592 | D | TDZE 588 |
|----------|----------|----------|

This diagram shows the approach and circling paths for NDB RWY 28. The approach is from the west, heading 280°, with a 3.10° glide slope and 55 feet of touchdown height. The circling pattern is a racetrack with headings of 100°, 280°, 100°, and 280°. The diagram also shows the location of the Tower (TWR) and the distance to the Final Approach Fix (FAF) of 4.1 NM.

REIL Rws 6 and 24 **L**
 TDZL/RCLS Rwy 28 **L**
 RCLS Rwy 10 **L**
 HIRL Rwy 10-28 **L**
 MIRL Rwy 6-24 **L**

FAF to MAP 4.1 NM

| | | | | | |
|---------|------|------|------|------|------|
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 4:06 | 2:44 | 2:03 | 1:38 | 1:22 |

| | | | | | |
|----------|---------|---------------|-----------------------|-------------------------------|-------------------------------|
| CATEGORY | A | B | C | D | E |
| | 1200/40 | 612 (700-3/4) | 1200-1 3/8 | 612 (700-1 3/8) | |
| CIRCLING | 1200-1 | 608 (700-1) | 1280-2 688 (700-2) | 1280-2 1/4 688 (700-2 1/4) | 1280-2 1/2 688 (700-2 1/2) |

NE-2, 14 MAY 2026 to 11 JUN 2026

NE-2, 14 MAY 2026 to 11 JUN 2026