

LOC/DME I-PIE 109.1 Chan 28	APP CRS 176°	Rwy Ldg TDZE Apt Elev	9180 7 11
-------------------------------------------------	------------------------	-----------------------------	--------------------------------------

ILS or LOC RWY 18

ST PETE-CLEARWATER INTL (PIE)

DME, RADAR, or ADF required.




⚠ Circling Rwy 22 NA at night. For inop ALS, increase S-ILS 18 Cat E visibility to RVR 4000 and S-LOC 18 Cat E visibility to 1 $\frac{1}{2}$ SM.

⚠ JINPI FIX MINIMUMS: For inop ALS, increase S-LOC 18 Cats C, D, and E visibility to RVR 4500.


MALS R

MISSED APPROACH: Climb to 600 then climbing right turn to 1700 on heading 330° and PIE VORTAC R-276 to LAFAL INT/PIE VORTAC 8 DME and hold, continue climb-in-hold to 1700.

ATIS 134.5	TAMPA APP CON 125.3 316.05	ST PETERSBURG-CLEARWATER TOWER * 118.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
----------------------	--------------------------------------	-----------------------------------------------------------------	-------------------------------	-------------------------

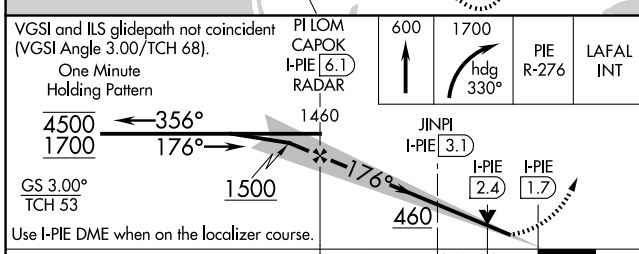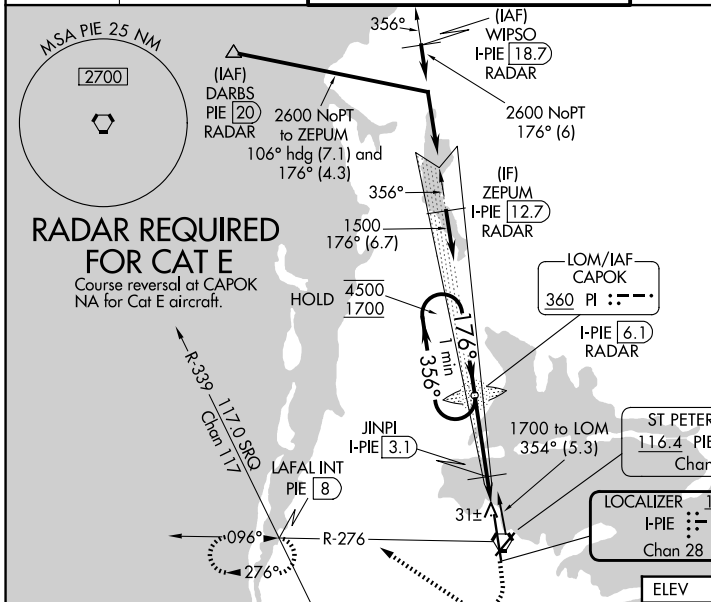

ELEV 11	D TDZE 7
176°	TDZL/RCLS Rwy 18 ①
	HIRL Rwy 18-36 ①
	MIRL Rwy 4-22 ①
	REIL Rwys 4 and 22



CATEGORY	A	B	C	D	E
S-ILS 18	207/18 200 (200- $\frac{1}{2}$)				
S-LOC 18	460/24	453 (500- $\frac{1}{2}$)	460/45 453 (500- $\frac{7}{8}$)		
CIRCLING	520-1	509 (600-1)	640-1 $\frac{3}{4}$	680-2	960-3
			629 (700-1 $\frac{3}{4}$)	669 (700-2)	949 (1000-3)
JINPI FIX MINIMUMS					
S-LOC 18	300/24 293 (300- $\frac{1}{2}$)				
CIRCLING	520-1	509 (600-1)	640-1 $\frac{3}{4}$	680-2	960-3
			629 (700-1 $\frac{3}{4}$)	669 (700-2)	949 (1000-3)

FAF to MAP 4.4 NM					
Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28

SE-3, 14 MAY 2026 to 11 JUN 2026

SE-3, 14 MAY 2026 to 11 JUN 2026