

LOC I-RDG 109.5	APP CRS 004°	Rwy Ldg 5151 TDZE 343 Apt Elev 344
---------------------------	------------------------	---

ILS or LOC RWY 36


READING RGNL/CARL A SPAATZ FLD (RDG)

⚠ Night Landing: Rwy 18, 31 NA. Inoperative table does not apply. When local altimeter setting not received, use Harrisburg Intl altimeter setting and increase S-ILS 36 DA to 686 feet and all Cats visibility ¼ SM, and increase all MDAs 100 feet, and S-LOC 36 Cats C and D and Circling Cats B and C visibility ¼ SM.

MALSF

MISSED APPROACH: Climb to 3000 on heading 004° and RAV VORTAC R-114 to DUMMR INT/RAV 22.9 DME and hold, continue climb-in-hold to 3000.

ATIS 127.1	HARRISBURG APP CON 125.15 257.9	READING TOWER ★ 119.9 (CTAF) 288.3	GND CON 121.9	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

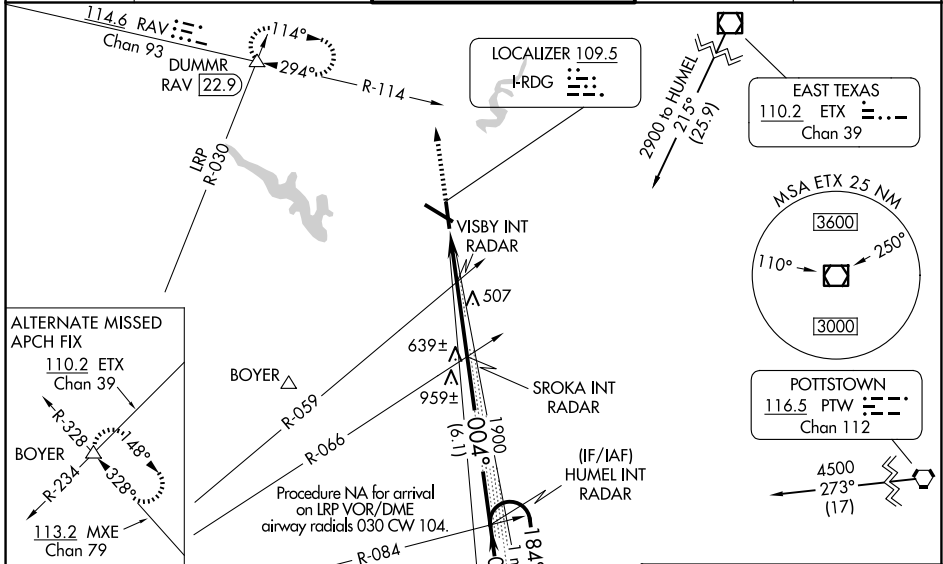


IAF LANCASTER 117.3 LRP Chan 120


IAF MODENA 113.2 MXE Chan 79

2700 NoPT 084° (17.3)

Procedure NA for arrival on MXE VORTAC airway radials 030 CW 025.

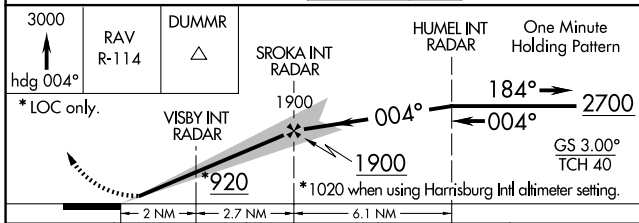

CATEGORY	A	B	C	D
S-ILS 36		593-1	250 (300-1)	
S-LOC 36	820-1	477 (500-1)	820-1¼ 477 (500-1¼)	820-1½ 477 (500-1½)
CIRCLING	1020-1 676 (700-1)	1080-1 736 (800-1)	1280-2¾ 936 (1000-2¾)	1660-3 1316 (1400-3)

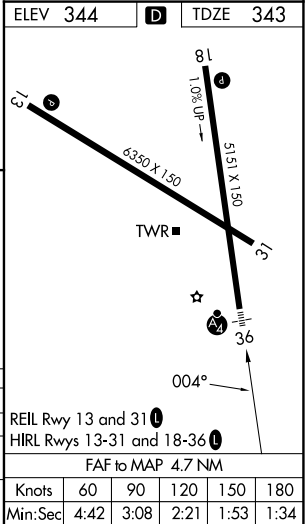

NE-4, 14 MAY 2026 to 11 JUN 2026

NE-4, 14 MAY 2026 to 11 JUN 2026