


|                         |                        |                             |                                       |
|-------------------------|------------------------|-----------------------------|---------------------------------------|
| WAAS<br>CH <b>72605</b> | APP CRS<br><b>319°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>7510</b><br><b>27</b><br><b>30</b> |
|-------------------------|------------------------|-----------------------------|---------------------------------------|

# RNAV (GPS) RWY 32


SARASOTA/BRADENTON INTL (SRQ)

|   |            |  |
|---|------------|--|
| RNP APCH.<br>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. When control tower closed, LPV and LNAV/VNAV NA; increase LNAV all Cats visibility to 1 mile. When control tower closed, inop table does not apply to LNAV Cats A and B. When control tower closed, for inop MALSRL, increase LNAV Cat C and D visibility to 1½ mile. | MALSRL<br> | MISSED APPROACH: Climb to 3000 direct ACIPU and on track 047° to PAIRS and hold, continue climb-in-hold to 3000. |
|---|------------|--|

|                        |  |  |                               |                         |
|------------------------|--|--|-------------------------------|-------------------------|
| ATIS<br><b>124.375</b> | TAMPA APP CON<br><b>119.65 353.575</b> | SARASOTA TOWER *<br><b>120.1(CTAF) 0 256.8</b> | GND CON<br><b>121.9 273.6</b> | UNICOM<br><b>122.95</b> |
|------------------------|--|--|-------------------------------|-------------------------|

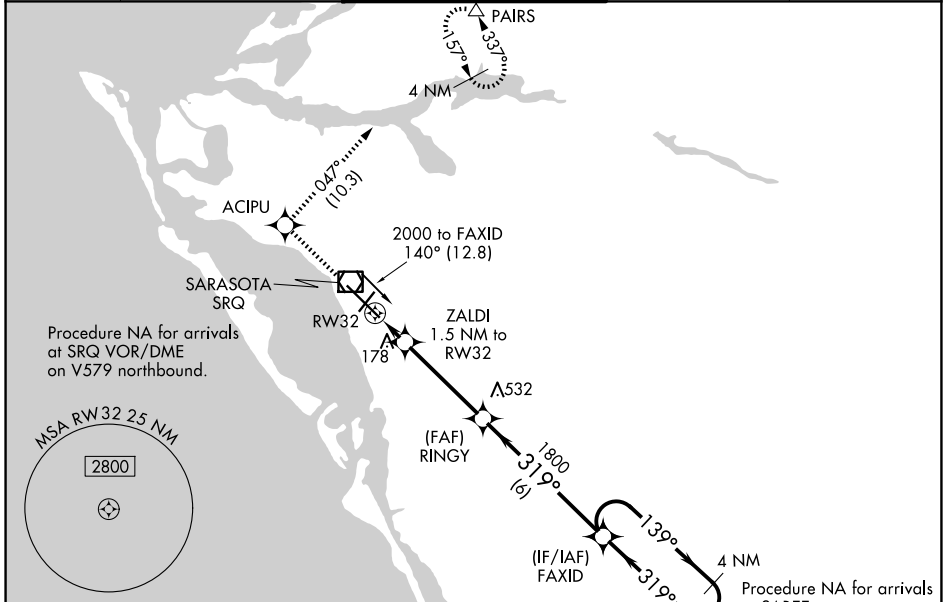

|         |          |         |
|---------|----------|---------|
| ELEV 30 | <b>D</b> | TDZE 27 |
|---------|----------|---------|

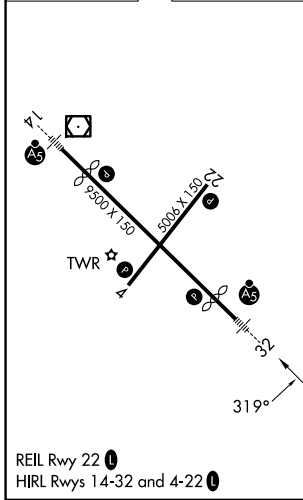

|              |                      |                     |                   |   |                      |
|--------------|----------------------|---------------------|-------------------|---|----------------------|
| 3000         | ACIPU                | PAIRS               | FAXID             |   | 4 NM Holding Pattern |
| ↑            |                      | tr 047°             |                   |   |                      |
| *LNAV only.  | ZALDI 1.5 NM to RW32 | RINGY 1800          | 139° → 2000       |   | GP 3.00° TCH 53      |
|              | RW32 540*            | 1800                | ← 319°            |   |                      |
|              | 1.5 NM               | 3.9 NM              | 6 NM              |   |                      |
| CATEGORY     | A                    | B                   | C                 | D |                      |
| LPV DA       | 227-½ 200 (200-½)    |                     |                   |   |                      |
| LNAV/DA VNAV | 463-1 436 (500-1)    |                     |                   |   |                      |
| LNAV MDA     | 440-½ 413 (500-½)    | 440-¾ 413 (500-¾)   |                   |   |                      |
| CIRCLING     | 500-1 470 (500-1)    | 600-1½ 570 (600-1½) | 600-2 570 (600-2) |   |                      |

SE-3, 14 MAY 2026 to 11 JUN 2026

SE-3, 14 MAY 2026 to 11 JUN 2026