

| | | | |
|-------------------------------------------------|------------------------|----------------------------------------------------|-------------|
| LOC/DME I-EWB 109.7 Chan 34 | APP CRS 054° | Rwy Ldg TDZE 70 Apt Elev 79 | 5400 |
|-------------------------------------------------|------------------------|----------------------------------------------------|-------------|

ILS or LOC RWY 5

NEW BEDFORD RGNL (EWB)


DME required.

Autopilot coupled approach NA below 470.
Circling Rwy 14 NA at night.
* RVR 1800 authorized with use of FD or AP or HUD to DA


MALSR

MISSED APPROACH: Climb to 800 then climbing left turn to 2100 on heading 210° and on I-EWB localizer SW course R-234 to BONNI INT/I-EWB 11.4 DME and hold.

| | | | | |
|-----------------------|---------------------------------------------|---------------------------------------------------|-------------------------|-------------------------|
| ATIS 126.85 | PROVIDENCE APP CON* 128.7 269.525 | NEW BEDFORD TOWER* 118.1 (CTAF) 0 239.0 | GND CON 121.9 | UNICOM 122.95 |
|-----------------------|---------------------------------------------|---------------------------------------------------|-------------------------|-------------------------|

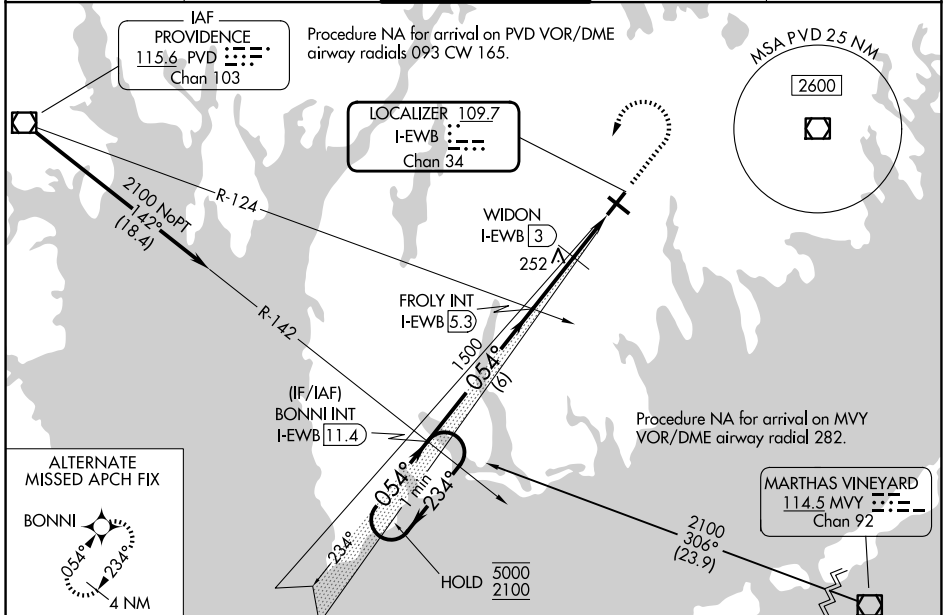

| | | | | | | | | |
|----------------------------|----------------------|---------------------|---------------|-----------|---------|-----------|---------|---------|
| One Minute Holding Pattern | BONNI INT I-EWB 11.4 | FROLY INT I-EWB 5.3 | WIDON I-EWB 3 | I-EWB 2.4 | I-EWB 1 | BONNI INT | ELEV 79 | TDZE 70 |
|----------------------------|----------------------|---------------------|---------------|-----------|---------|-----------|---------|---------|

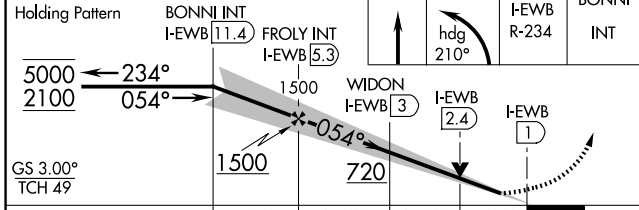

MIRL Rwy 14-32
HIRL Rwy 5-23
REIL Rwy 32

| | | | | | |
|-------------------|------|------|------|------|------|
| FAF to MAP 4.4 NM | | | | | |
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 4:24 | 2:56 | 2:12 | 1:46 | 1:28 |

| CATEGORY | A | B | C | D |
|--------------------|----------------------|----------------------|------------------------|----------------------|
| S-ILS 5* | 270/24 200 (200-½) | | | |
| S-LOC 5 | 720/24 | 650 (700-½) | 720-1¾ | 650 (700-1¾) |
| CIRCLING | 720-1 | 641 (700-1) | 720-1¾ 641 (700-1¾) | 960-3 881 (900-3) |
| WIDON FIX MINIMUMS | | | | |
| S-LOC 5 | 560/24 | 490 (500-½) | 560/50 | 490 (500-1) |
| CIRCLING | 620-1 541 (600-1) | 640-1 561 (600-1) | 720-1¾ 641 (700-1¾) | 960-3 881 (900-3) |

NE-1, 14 MAY 2026 to 11 JUN 2026

NE-1, 14 MAY 2026 to 11 JUN 2026