


LOC I-ONP <b>111.5</b>	APP CRS <b>162°</b>	Rwy Ldg TDZE Apt Elev	<b>5398</b> <b>152</b> <b>160</b>
---------------------------	------------------------	-----------------------------	---



# ILS or LOC RWY 16

NEWPORT MUNI (ONP)

**▽** Inop table does not apply to S-ILS Rwy 16, all Cats. DME required. VDP NA when using Tillamook altimeter setting. Rwy 16 helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Tillamook altimeter setting; increase DA to 537 feet and all MDA 140 feet; increase S-LOC 16 Cat C/D visibility 3/8 mile and increase Circling Cat B visibility 1/4 mile. For inop MALSRS, increase S-LOC 16 Cat A/B visibility to 1 mile and Cat C/D visibility to 1 3/8 mile. For inop MALSRS when using Tillamook altimeter setting, increase S-ILS 16 all Cats visibility to 1 1/4 mile and increase S-LOC 16 Cat A/B visibility to 1 mile. DME from ONP VORTAC. Simultaneous reception of I-ONP and ONP DME required.

**MALSRS**  
  
**MISSED APPROACH:** Climb to 1000 then climbing right turn to 3000 on heading 020° and on ONP VORTAC R-343 to BUHRS/ONP 6.6 DME and hold, continue climb-in-hold to 3000.

AWOS-3PT <b>133.9</b>	SEATTLE CENTER <b>125.8 291.7</b>	UNICOM <b>122.8 (CTAF)</b>
--------------------------	--------------------------------------	-------------------------------

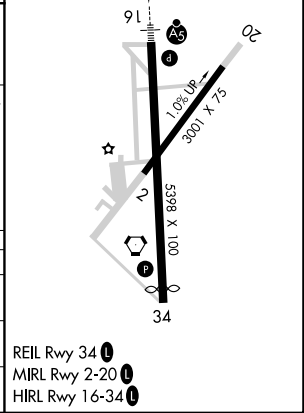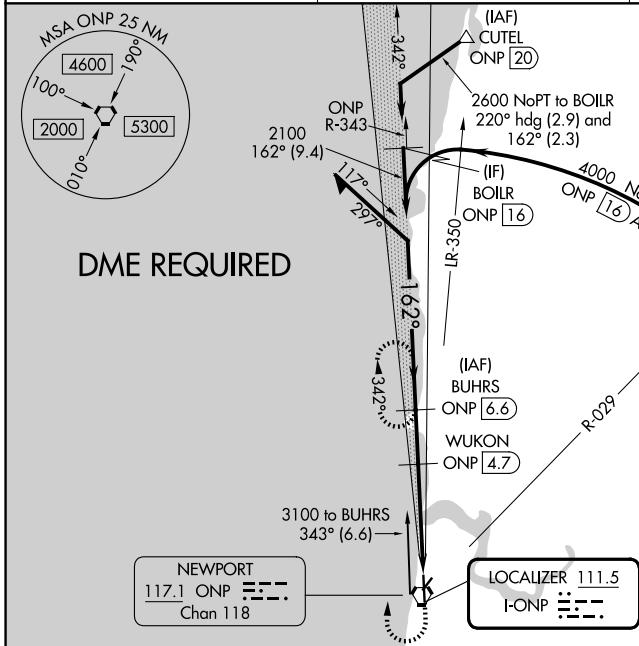

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 51)

Remain within 10 NM

2600  
 342°  
 162°  
 2100  
 GS 3.00° TCH 55

CATEGORY	A	B	C	D
S-ILS 16		402-3/4	250 (300-3/4)	
S-LOC 16	660-3/4	508 (500-3/4)	660-1	508 (500-1)
CIRCLING	880-1 720 (800-1)	1000-1 1/4 840 (900-1 1/4)	1400-3 1240 (1300-3)	1600-3 1440 (1500-3)

NW-1, 14 MAY 2026 to 11 JUN 2026

NW-1, 14 MAY 2026 to 11 JUN 2026