RNAV (RNP) Y RWY 23

MORRISTOWN MUNI (MMU)

APP CRS	Rwy Ldg	5998
229°	TDZE	184
	Apt Elev	187

RNP AR APCH - GPS. Authorization required. From HOLEM: RF

When local altimeter setting not received, procedure NA. For uncompensated Baro-VNAV systems, procedure NA Below -15°C or above 54°C. For inop ALS, increase RNP 0.11 all Cats visibility to 1 SM and RNP 0.30 all Cats visibility to 1¾ SM.

MALSR

MISSED APPROACH: Climb to 2000 direct SUCSO then on track 250° to SBJ VOR/DME and hold.

ATIS	NEWARK APP CON	MORRISTOWN TOWER ★	GND CON
124.25	127.6 379.9	118.1 (L) (CTAF) 353.9	134.2

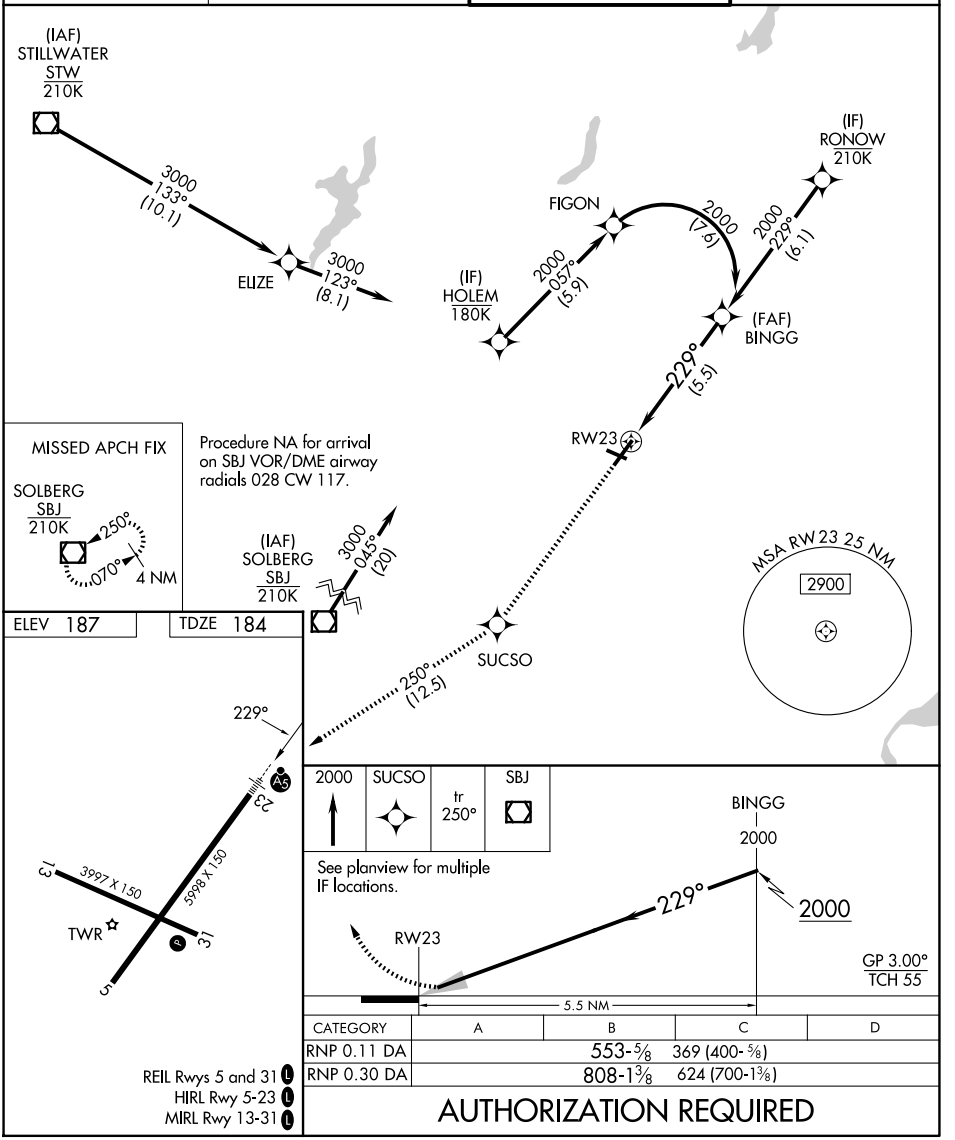

CATEGORY	A	B	C	D
RNP 0.11 DA		553-⅝	369 (400-⅝)	
RNP 0.30 DA		808-1⅜	624 (700-1⅜)	

REIL Rwys 5 and 31 (L)
HIRL Rwy 5-23 (L)
MIRL Rwy 13-31 (L)

AUTHORIZATION REQUIRED

NE-2, 14 MAY 2026 to 11 JUN 2026
NE-2, 14 MAY 2026 to 11 JUN 2026