

VOR or TACAN RWY 22L

| | | | |
|---|-------------------------|-------------------------------|---------------------------------------|
| VORTAC SLI 115.7 Chan 104 | APCH CRS 214° | Rwy Idg TDZE Arprt Elev | 8001 36 36 |
|---|-------------------------|-------------------------------|---------------------------------------|


[USA]

LOS ALAMITOS AAF (JOINT FORCES TRAINING BASE JFTB) (KSLI)



| | | |
|--|-----------|---|
| DME required | SALSF | MISSED APPROACH: Climb to 1800, then climbing left turn to 3100 via SLI VORTAC R-058 to AHEIM INT and hold, continue climb-in-hold. |
| <p>▼ * When ALS inop, increase CAT CD vis to 1 3/8 miles.</p> <p>** Circling not authorized N of Rwy 4L-22R. Circling to Rwy 4R not authorized at night.</p> | | |

| | | | |
|--------------------------------|--|-------------------------------|---------------------------------|
| ATIS 118.875 379.975 | SOCAL APP CON 125.35 316.125 | TOWER 123.85 251.15 | GND CON 126.95 257.95 |
|--------------------------------|--|-------------------------------|---------------------------------|

When local altimeter setting not received, use John Wayne/Orange County altimeter setting.

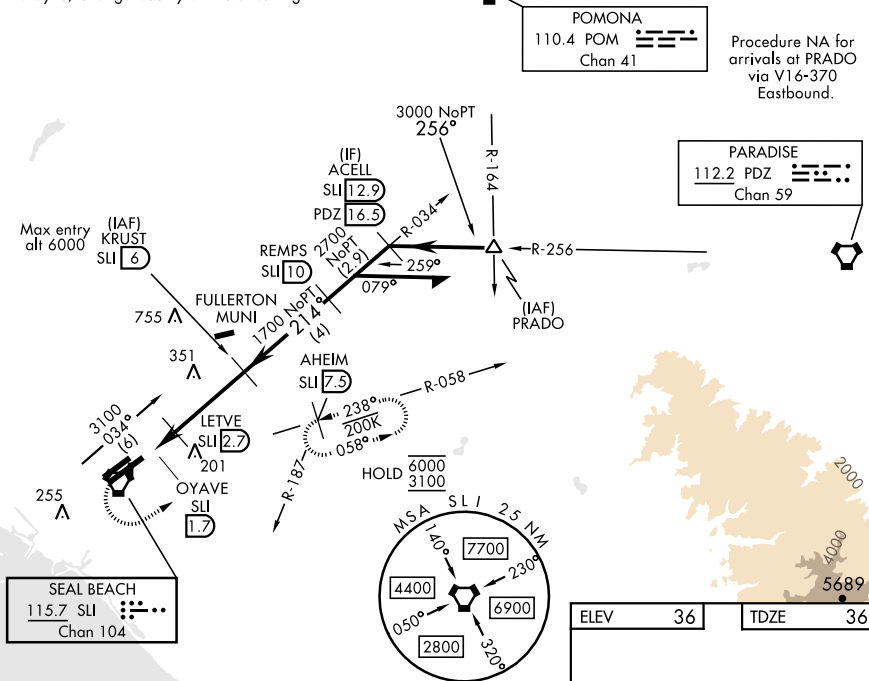

| | | | |
|------|----|------|----|
| ELEV | 36 | TDZE | 36 |
|------|----|------|----|

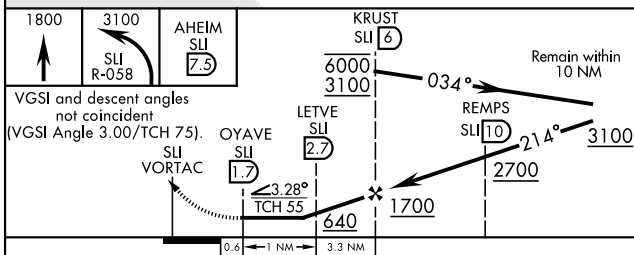

| CATEGORY | A | B | C | D |
|--|-------|-------------|---------------------------|-------------------|
| S-22L* | 500-1 | 464 (500-1) | 500-1 1/8 464 (500-1 1/8) | |
| CIRCLING** | 500-1 | 464 (500-1) | 600-1 1/2 564 (600-1 1/2) | 600-2 564 (600-2) |
| KNSA-SNA (JOHN WAYNE/ORANGE COUNTY) ALTIMETER SETTING MINIMUMS | | | | |
| S-22L | 540-1 | 504 (600-1) | 540-1 3/8 504 (600-1 3/8) | |
| CIRCLING** | 540-1 | 504 (600-1) | 640-1 3/4 604 (700-1 3/4) | 640-2 604 (700-2) |

HIRL Rwy 4R-22L
MIRL Rwy 4L-22R
REIL Rwy 22L

VOR or TACAN RWY 22L

SW-3, 14 MAY 2026 to 11 JUN 2026

SW-3, 14 MAY 2026 to 11 JUN 2026