

| | | |
|--|------------------------|--|
| WAAS CH 63019 W19A | APP CRS 196° | Rwy Ldg 10302 TDZE 1330 Apt Elev 1333 |
|--|------------------------|--|

RNAV (GPS) Y RWY 19R



WICHITA DWIGHT D EISENHOWER NTL (ICT)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative MALSR, increase LNAV Cat C/D visibility to RVR 6000. # RVR 1800 authorized with use of FD or AP or HUD to DA.





MISSED APPROACH: Climb to 3600 direct CUTIK and hold.

| | | | |
|-----------------------|---------------------------------------|-------------------------------------|-------------------------------|
| ATIS 125.15 | WICHITA APP CON 126.7 353.5 | WICHITA TOWER 118.2 257.8 | GND CON 121.9 348.6 |
|-----------------------|---------------------------------------|-------------------------------------|-------------------------------|

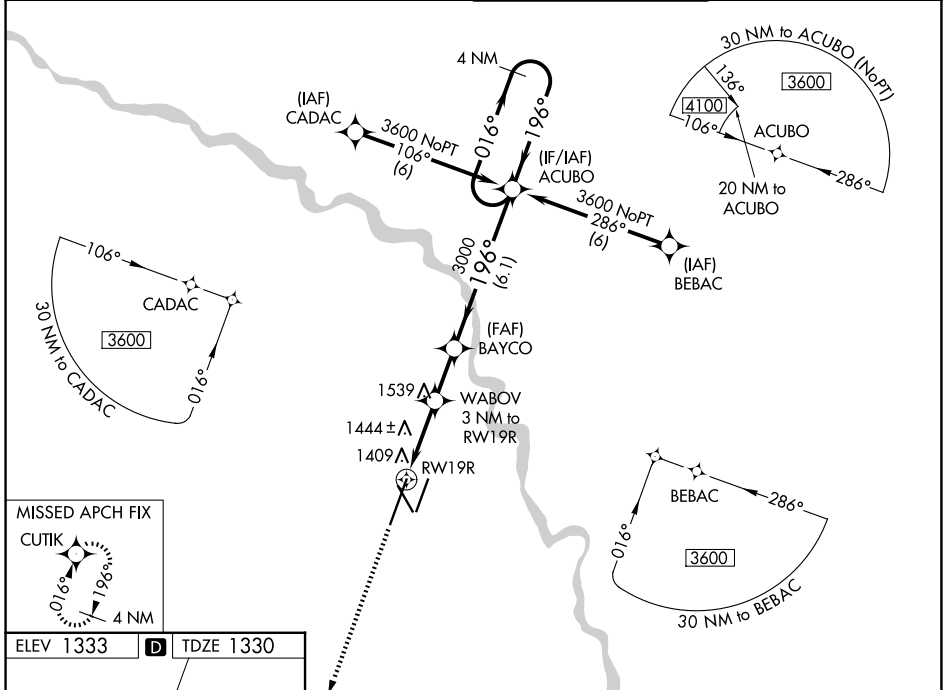

| | | |
|-----------|----------|-----------|
| ELEV 1333 | D | TDZE 1330 |
|-----------|----------|-----------|

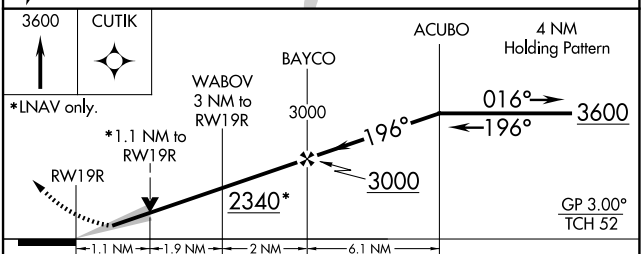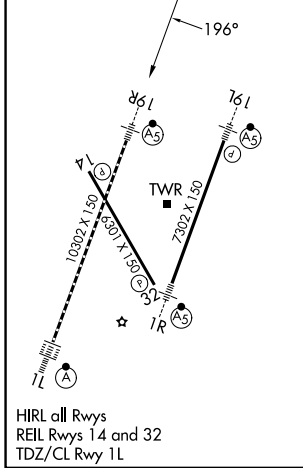

| CATEGORY | A | B | C | D |
|--------------|---------------------|-------------|-------------------------|-----------------------|
| LPV DA # | 1530/24 200 (200-½) | | | |
| LNAV/VNAV DA | 1742/45 412 (500-¾) | | | |
| LNAV MDA | 1740/24 | 410 (500-½) | 1740/40 | 410 (500-¾) |
| CIRCLING | 1800-1 | 467 (500-1) | 1980-1¾ 647 (700-1¾) | 1980-2 647 (700-2) |

NC-2, 14 MAY 2026 to 11 JUN 2026

NC-2, 14 MAY 2026 to 11 JUN 2026