



WAAS CH 86215 W07B	APP CRS 074°	Rwy Ldg 10600 TDZE 128 Apt Elev 151
--	------------------------	--

RNAV (GPS) RWY 7L

TED STEVENS ANCHORAGE INTL (ANC) (PANC)

RNP APCH. ▼ ▲ -21°C	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats and LNAV Cat C/D visibility to 1 3/8 SM.	MALS R ⊙	MISSED APPROACH: Climb to 800 then climbing right turn to 3000 direct JUKEP and hold.
------------------------------	---	-------------	---

D-ATIS 135.5	ANCHORAGE APP CON 118.6 290.5	ANCHORAGE TOWER 118.3 257.8	GND CON 121.9 338.25
------------------------	---	---------------------------------------	--------------------------------

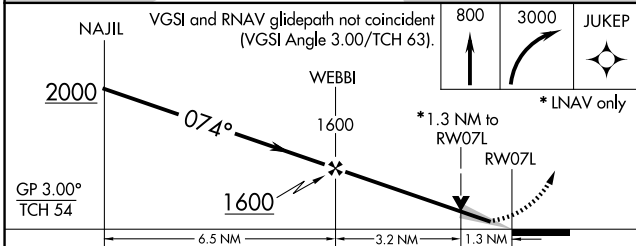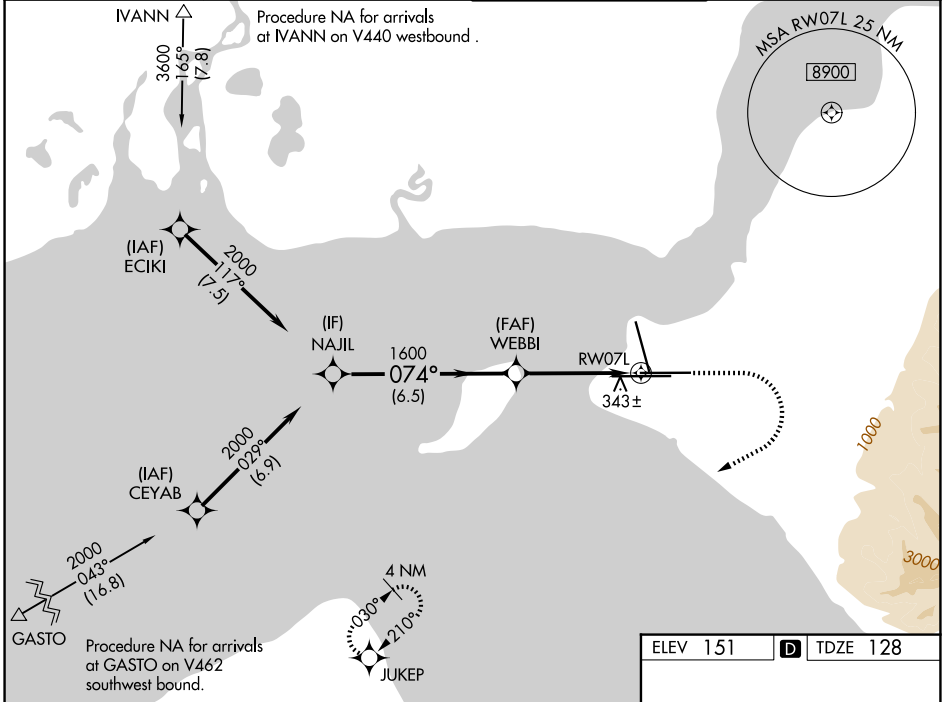

ELEV 151	D TDZE 128
HIRL all rwys REIL Rwy 33 TDZL/RCLS Rwy 7L and 7R	

CATEGORY	A	B	C	D
LPV DA		328/18	200 (200-1/2)	
LNAV/VNAV DA		595/50	467 (500-1)	
LNAV MDA	600/24	472 (500-1/2)	600/50	472 (500-1)
CIRCLING	700-1	549 (600-1)	800-1 3/4 649 (700-1 3/4)	920-2 1/2 769 (800-2 1/2)