




APP CRS 063°	Rwy Ldg 11014 TDZE 256 Apt Elev 305
------------------------	----------------------------------------------------------------

RNAV (RNP) Z RWY 6L

GUAM INTL (GUM)(PGUM)

RNP AR APCH - GPS. ▼ For uncompensated Baro-VNAV systems, procedure NA below 19°C or above 48°C. For inop ALS, increase RNP 0.30* visibility to ¾ SM and RNP 0.30 visibility to 1½ SM.	MALSR 	MISSED APPROACH: Climb to 3000 on 063° track to WABOX and hold. *Missed approach requires minimum climb of 276 feet per NM to 1400.
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------	----------------------------------------------------------------------------------------------------------------------------------------

ATIS 119.0	GUAM CERAP 119.8 269.0	AGANA TOWER 118.1 340.2	GND CON 121.9 336.4
----------------------	----------------------------------	-----------------------------------	-------------------------------

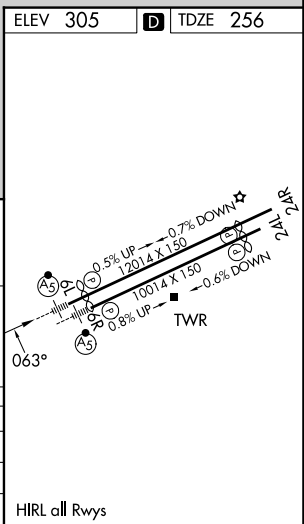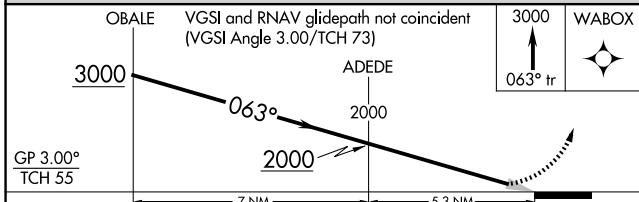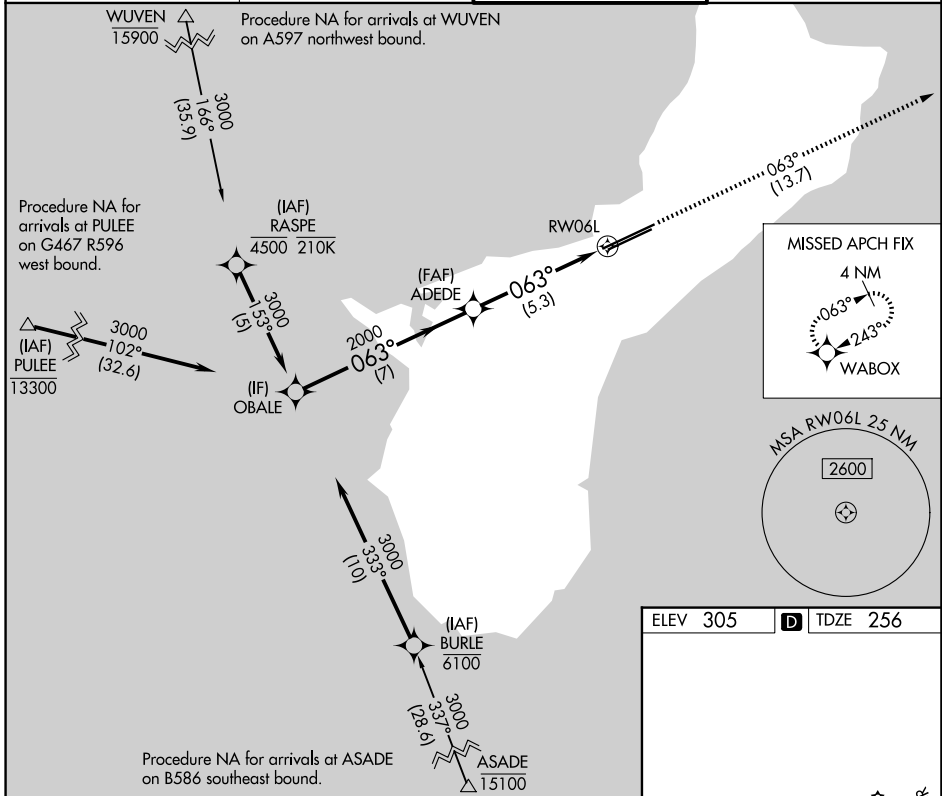

CATEGORY	A	B	C	D
RNP 0.30 DA*		514-½	258 (300-½)	
RNP 0.30 DA		656-⅝	400 (400-⅝)	

AUTHORIZATION REQUIRED

HIRL all Rwys