RNAV (GPS) RWY 9

ESLER RGNL (ESF)

WAAS	APP CRS	Rwy Ldg	5998
CH 77617	090°	TDZE	96
W09A		Apt Elev	112

RNP APCH-GPS.

Circling Rwy 14, 32 NA at night. Baro-VNAV and VDP NA when using Alexandria Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C. When local altimeter setting not received, use Alexandria Intl altimeter setting: increase LPV DA to 331 feet; increase LNAV/VNAV DA to 644 feet and all visibility ¼ SM; increase all MDAs 40 feet and Circling visibility Cat D ¼.

MISSED APPROACH: Climb to 3000 direct ILULE and hold.

ESF ASOS	MAKS APP CON	UNICOM
119.425	125.4 254.8	122.8 (CTAF) L

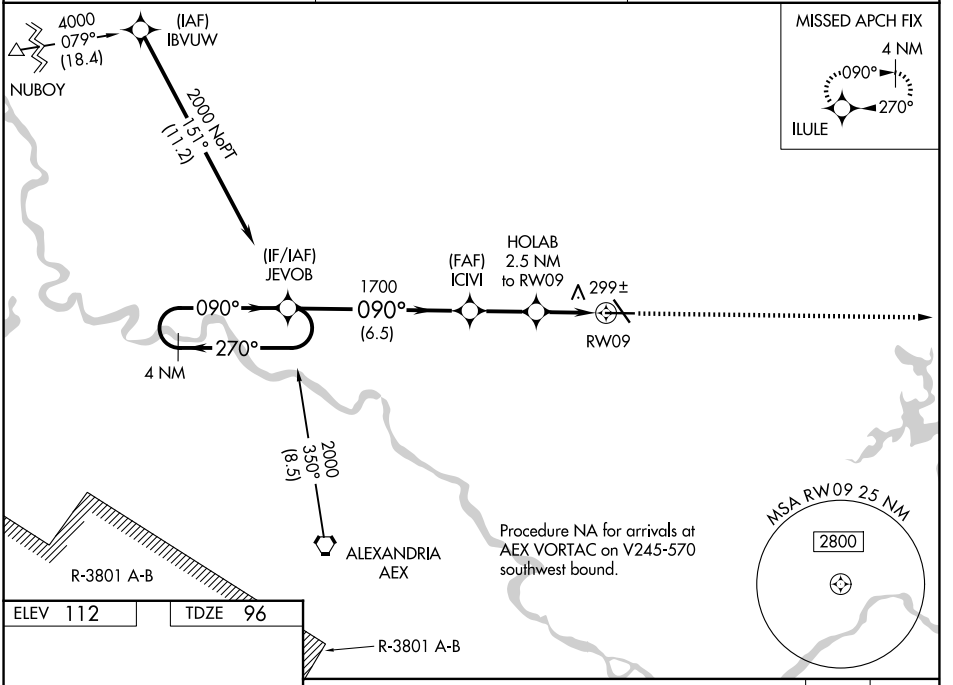

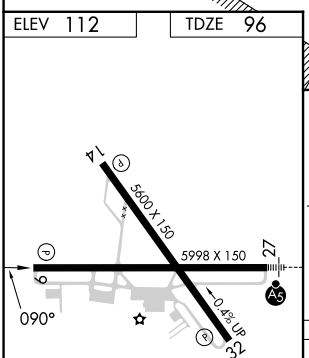

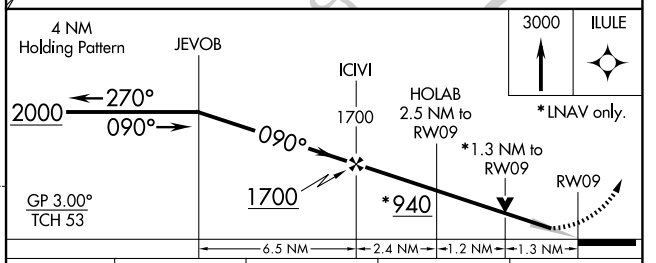

CATEGORY	A	B	C	D
LPV DA	296-¾ 200 (200-¾)			
LNAV/ VNAV DA	609-1⅜ 513 (500-1⅜)			
LNAV MDA	560-1 464 (500-1)		560-1⅜ 464 (500-1⅜)	
CIRCLING	600-1 488 (500-1)		740-1¾ 628 (700-1¾)	760-2 648 (700-2)

REIL Rwys 9, 14 and 32 L
MIRL Rwy 14-32 L
HIRL Rwy 9-27 L

SC-4, 14 MAY 2026 to 11 JUN 2026
SC-4, 14 MAY 2026 to 11 JUN 2026