


RNAV (RNP) Z RWY 31


CORPUS CHRISTI INTL (CRP)

| | | |
|-------------|----------|-------------|
| APP CRS | Rwy Ldg | 7510 |
| 312° | TDZE | 43 |
| | Apt Elev | 46 |


▼ For uncompensated Baro-VNAV systems, procedure NA below -1°C (31°F) or above 54°C (130°F). GPS and RF required. For inop MALSR, increase RNP 0.14 all Cats visibility to 7/8 mile.
 *Missed approach requires minimum climb of 335 feet per NM to 500.

MALSR

MISSED APPROACH: Climb to 2000 on track 312° to ATHIS and hold.
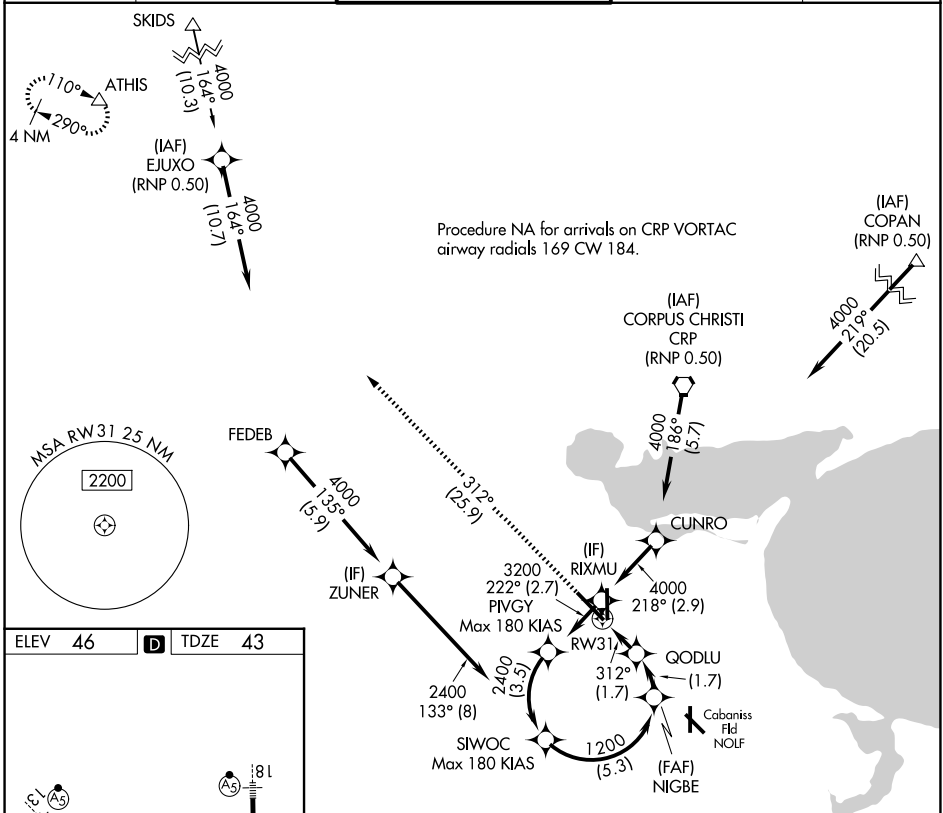
| | | | | |
|-----------------------------|---|---|---------------------------------------|----------------------------------|
| ATIS 126.8 | CORPUS APP CON 120.9 348.725 | CORPUS TOWER 119.4 257.8 | GND CON 121.9 269.15 | CLNC DEL 118.55 |
|-----------------------------|---|---|---------------------------------------|----------------------------------|

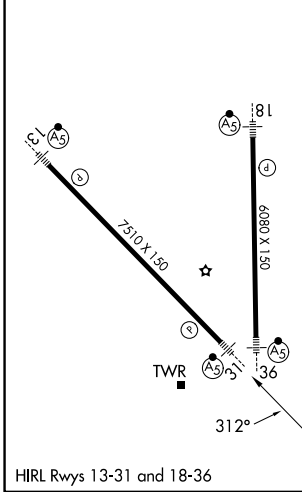

| | | |
|---------|----------|---------|
| ELEV 46 | D | TDZE 43 |
|---------|----------|---------|



| | | | |
|--------------|--------|---|---------------|
| 2000 | ATHIS | See planview for multiple IF locations. | SIWOC |
| ↑ | △ | | |
| fr 312° | | | |
| RW31 | GODLU | NIGBE | 2400 |
| | 646 | 1200 | |
| | | 1200 | |
| | 1.7 NM | 1.7 NM | 5.3 NM |
| CATEGORY | A | B | C |
| RNP 0.14 DA* | | 303-1/2 | 260 (300-1/2) |
| RNP 0.30 DA | | 384-5/8 | 341 (400-5/8) |

AUTHORIZATION REQUIRED

SC-3, 14 MAY 2026 to 11 JUN 2026

SC-3, 14 MAY 2026 to 11 JUN 2026